

041505

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
23 October 2003 (23.10.2003)


PCT

(10) International Publication Number
WO 03/088501 A2

- (51) International Patent Classification⁷: **H03M 13/00** (74) Agent: **DEGUELLE, Wilhelmus, H., G.**; internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: **PCT/IB03/01542**
- (22) International Filing Date: **17 April 2003 (17.04.2003)** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
02076526.9 18 April 2002 (18.04.2002) EP
- (71) Applicant (*for all designated States except US*): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **COENE, Willem, M., J., M.** [BE/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **KALKER, Antonius, A., C., M.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: SIGNAL, STORAGE MEDIUM, METHOD AND DEVICE FOR ENCODING, METHOD AND DEVICE FOR DECODING

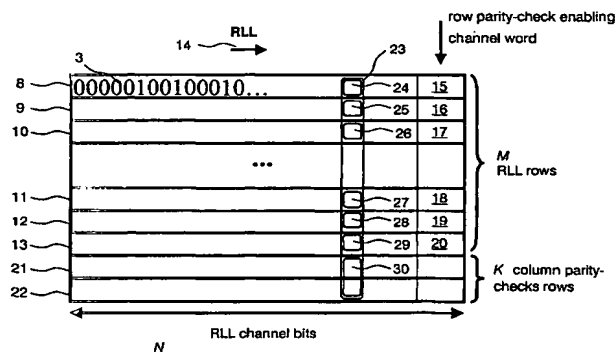

(57) Abstract: The invention relates to a signal comprising a runlength limited (RLL) encoded binary d,k channel bitstream 3, wherein parameter d defines a minimum number and parameter k defines a maximum number of zeroes between any two ones of said bitstream 3 or vice versa, comprising a number of sections of respectively N successive RLL channel bits, called RLL rows 8-13, 45, each RLL row 8-13, 45 representing a parity-check code-word, called row parity-check code-word, in which a so-called row-based parity-check constraint for said RLL row 8-13, 45 has been realized, characterized in that K sections of respectively N successive channel bits, called column parity-check rows 21, 22, 43, 44, 46, are located at predetermined positions of a group of M RLL rows 8-13, 45, K, N and M being integer values, said column parity-check rows 21, 22, 43, 44, 46 comprising a plurality of column parity-check enabling channel words 30, 42, 48, wherein each of said column parity-check check enabling channel words 30, 42, 48 realizes a so-called column-based parity-check constraint for all so-called corresponding segments 24-29 of at least said M RLL rows 8-13, 45 of said group that correspond to a specific column parity-check enabling channel word 30, 42, 48), hereby constituting a column parity-check codeword. Furthermore, the invention relates to a storage medium comprising such a signal as well as a method and a device for encoding a stream of user data bits into such a signal as well as a method and a device for decoding such a signal.

WO 03/088501 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Signal, storage medium, method and device for encoding, method and device for decoding

The invention relates to a signal comprising a runlength limited (RLL) encoded binary d,k channel bitstream, wherein parameter d defines a minimum number and parameter k defines a maximum number of zeroes between any two ones of said bitstream or vice versa, comprising a number of sections of respectively N successive RLL channel bits, called RLL rows, each RLL row representing a parity-check code-word, called row parity-check code-word, in which a so-called row-based parity-check constraint for said RLL row has been realized.

Furthermore, the invention relates to a storage medium comprising such a signal.

Furthermore, the invention relates to a method for encoding a stream of user data bits comprising the step of runlength limited (RLL) encoding said stream of user data bits into a binary d,k channel bitstream comprising a number of sections of respectively N successive RLL channel bits, called RLL rows, wherein parameter d defines a minimum number and parameter k defines a maximum number of zeroes between any two ones of said bitstream or vice versa, each RLL row representing a parity-check code-word, called row parity-check code-word in which a so-called row-based parity-check constraint for said RLL row has been realized.

Furthermore, the invention relates to a corresponding device according to the preamble of claim 33.

Furthermore, the invention relates to a method for decoding such a signal or a signal being encoded according to such a method for encoding.

Furthermore, the invention relates to a device for decoding such a signal or a signal being encoded according to such a method for encoding.

In the field of mass data storage media, such as optical discs, magnetic discs and magneto-optical discs, digital surface recorders are used that are substantially narrow bandpass signaling devices. Therefore, the data to be recorded on such media is encoded such, to eliminate very long as well as very short written pits. This encoding is called "modulation coding". It typically employs a runlength limited (RLL) code which is characterized by two parameters, namely the constraints d,k , wherein $d \leq k$. RLL-encoded

binary sequences have at least d , but no more than k zeroes between any two ones.

Transitions between written pits correspond to occurrences of ones. A one in the binary d,k channel bitstream corresponds to a transition between e.g. pit and land (wherein "land" defines the space between two pits). Thus, the minimum-length pit or land consists of $d+1$ channel bits and the maximum-length land or pit consists of $k+1$ channel bits.

Fig. 1 shows a bitstream of un-constrained user data 1 that are RLL encoded 2 with d,k constraints and a code rate $R = m/n$. Thus, an NRZ or d,k channel bit stream 3 is obtained, in which the ones represent transitions from pit to land or vice versa.

An RLL waveform 4 is recorded on a storage medium, e.g. a disc, by using lands and pits. Whenever a "1" occurs in the d,k channel bitstream 3, the RLL waveform 4 performs a transition from land to pit or vice versa. Thus, pits and lands both represent strings of zeroes of varying length, each string being preceded by a one-bit which indicates the transition between them, so that the length of a run of bits of the same polarity (pit or land) equals the number of zeroes plus one.

One of the major error sources during read-out of such a disc are random errors, due to imperfections in deriving the d,k channel bitstream from the HF (high-frequent) signal waveform. For the case of a perfect channel (without any intersymbol-interference or ISI) this waveform equals to RLL waveform 4 which is the waveform directly generated from the bipolar channel bitstream (with values equal to either +1 or -1). However, the actual HF waveform in case of a realistic channel in the presence of (linear and/or non-linear) ISI is a rounded version of RLL waveform 4, with lower amplitude at shorter runlengths, according to the eye-pattern. This actual HF-waveform is used for bit-detection, and here so-called "single-bit transition-shift errors" (SBTSE) can be made.

Random errors (in the optical recording channel) most often lead to a shift of a transition ("1"-bit in the d,k channel bitstream) over a distance of a single bit. A corresponding error event 5 is depicted in the channel bitstream 6 that is detected from the actual HF waveform. This error event 5 results in a shift of the transition from the first land to the second pit over a distance of a single bit. Such an error event 5 is a SBTSE. In the detected (erroneous) d,k bitstream 7 such a SBTSE results in a shift of a "1" over a distance of one bit.

For random errors of this specific type, it is advantageous not to use the standard error correction coding (ECC) with algebraic Reed-Solomon error-correcting codes since the latter requires two user bytes (called parity-bytes) of overhead for correction of a

single random error (one parity-byte for location of the error and one parity-byte for correction of the byte-value).

Instead, specifically designed parity-check RLL codes can be used to detect the presence of such a random error, and channel side-information, like the magnitude of phase-errors generated at each transition of the HF waveform in a PLL, can be used to locate the error.

Several proposals for such parity-check RLL coding have been made, such as in H.M. Hilden, D.G. Howe, E.J. Weldon, "Shift Error Correcting Modulation Codes", IEEE Trans. Magn., vol. 27, 1991, pp. 4600-4605; Y. Saitoh, I. Ibe, H. Imai, "Peak-Shift and Bit Error-Correction with Channel Side Information in Runlength-Limited Sequences", 10th Int. Symp. Applied Algebra, Algebraic Algorithms and Error-Correcting Codes, vol. AAEC-10, 1993, pp. 304-315; P. Perry, M.-C. Lin, Z. Zhang, "Runlength-Limited Codes for Single Error-Detection with Mixed Type Errors", IEEE Trans. Inform. Theory, vol. 44, 1998, pp. 1588-1592; S. Gopalaswamy, J. Bergmans, "Modified Target and Concatenated Coding for $d = 1$ Constrained Magnetic Recording Channels", Proceedings of the ICC 2000, New Orleans, June 18-22, 2000; and H. Sawaguchi, M. Kondou, N. Kobayashi, S. Mita, "Concatenated Error Correction Coding for High-Order PRML Channels", Proceedings of Globecom 1998, Sidney, pp. 2694-2699.

Furthermore, one of the inventors of the present invention published the idea to use so-called combi-codes for parity-check RLL coding, in: W.M.J. Coene, H.P. Pozidis, J.W.M. Bergmans, Title: "Run-Length Limited Parity-Check Coding for Transition-Shift Errors in Optical Recording", Proceedings of Globecom 2001, Paper SPS01_6, San Antonio (USA), Nov. 25-29 2001.

In the latter reference it was shown that for the case of a single SBTSE the overhead for random-error correction was reduced to a single user-bit, with error-location handled via channel side-information, and disadvantages of previous schemes for parity-check RLL coding have been eliminated.

The procedure to use channel side-information for SBTSE is to search among all transitions that are detected and used in the phase-locked loop (PLL) for the purpose of timing-recovery, for the transition that has the phase-error with the largest absolute value and then shift backwards the corresponding transition (or "1"-bit) in the d, k channel bitstream. However, this procedure may not be 100% full-proof: there can also be large phase-errors that correspond to error-free transitions, quantization of phase-errors may have an effect, etc.

Therefore, it is an object of the present invention to provide an alternative way for error-location, where the need to use channel side-information is avoided, or at least, reduced considerably.

This object is achieved by a signal comprising an RLL encoded binary d, k channel bitstream according to the above-mentioned type characterized in that K sections of respectively N successive channel bits, called column parity-check rows, are located at predetermined positions of a group of M RLL rows, K , N and M being integer values, said column parity-check rows comprising a plurality of column parity-check enabling channel words, wherein each of said column parity-check enabling channel words realizes a so-called column-based parity-check constraint for all so-called corresponding segments of at least said M RLL rows of said group that correspond to a specific column parity-check enabling channel word, and constitute together with said column parity-check enabling channel word the column parity-check codeword.

The object is further achieved by providing a storage medium storing such a signal.

The object is further achieved by providing a method for encoding a stream of user data bits according to the above-mentioned type characterized by the further step of: generating K sections of respectively N successive channel bits, called column parity-check rows, at predetermined positions of a group of M RLL rows, K , N and M being integer values, said parity-check rows comprising a plurality of column parity-check enabling channel words, wherein each of said column parity-check enabling channel words realizes a so-called column-based parity-check constraint for so-called corresponding segments of at least said M RLL rows of said group that correspond to a specific column parity-check enabling channel word, and constitute together with said column parity-check enabling channel word the column parity-check codeword.

The object is further achieved by providing a corresponding device for encoding a stream of user data bits according to claim 33.

Furthermore, the object is achieved by a method for decoding a signal being encoded according to such a method for encoding a stream of user data bits according to claim 35.

Furthermore, the object is achieved by a corresponding device according to claim 47 for decoding a signal being encoded according to such a method for encoding a stream of user data bits.

The basic idea of the invention is to apply a two-dimensional code structure, namely a so-called product code, to the RLL encoded binary d,k channel bitstream. Such a product code provides a powerful error-correction technique.

So-called column-based parity-check constraints are constructed over columns
5 that consist of RLL encoded segments from different RLL rows. However, the columns need not necessarily be vertically arranged but may also be arranged in such a way that in each RLL row there is one segment of the d,k channel bitstream that corresponds by means of a predetermined allocation to a specific column parity check segment, e.g. in a transversal way. Therefore, speaking in general terms, column parity-check segments of column parity-check
10 rows realize the column-based parity-check constraint for all corresponding segments of all RLL rows of the group (cluster, or product-code word), wherein each of these corresponding segments correspond to a specific column parity-check segment. It is not mandatory that these corresponding segments are located at the same (horizontal) position within the different RLL rows, even though this is preferred, thus resulting in the latter case in exactly
15 vertically oriented columns constituting the column parity-check codewords.

Random channel errors can easily be located at crossing points between erroneous parity-check rows (or row parity-check codewords) and erroneous parity-check columns (or column parity-check codewords). Thus, the need to use channel side-information is reduced to a large extent if not completely removed as is possible for some particular
20 cases.

Preferably, for a non-trivial d - and k -constraints, thus excluding $d=0$ and $k=0$, at least two column parity-check rows are provided for each group of RLL rows. Thus, the RLL constraints can be realized within the column parity-check rows as well. Furthermore, DC-control is thus enabled.

25 Preferably, there are provided so-called merging segments between the column parity-check segments within the column parity-check rows. These merging segments facilitate to realize the RLL constraints when concatenating successive words, and to enable DC-control.

These merging segments are preferably respectively arranged over a plurality
30 of successive channel bits and are thus arranged in a row-based manner. Alternatively these merging segments may be arranged in a column-based manner.

Further advantageous developments are defined in the dependent claims. These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter with reference to the accompanying drawing, in which:

5 Fig. 1 shows the RLL encoding of user data with (d,k) constraints yielding a (d,k) channel bitstream, the RLL waveform recorded on a disc, the detected RLL bitstream, and the derived (d,k) bitstream as being prior art;

Fig. 2 shows a product code scheme for RLL parity-check coding according to a preferred embodiment of the present invention;

10 Fig. 3 shows a scheme for correction of a single-error event;

Fig. 4 shows a scheme for correction of a double-error event;

Fig. 5 shows a bitstream in the column parity-check rows according to a further embodiment of the present invention;

15 Fig. 6 shows the bitstream in the column parity-check rows according to a still further embodiment of the present invention;

Fig. 7 shows a "zig-zag" scheme for vertical or column-based parity-check coding according to a still further embodiment of the present invention;

Fig. 8 shows the situation of a SBTSE crossing the boundaries of two adjacent segments for the case of the embodiment according to Fig. 7;

20 Fig. 9 shows a single SBTSE event occurring in the embodiment according to Fig. 7;

Fig. 10 shows a double SBTSE event in the embodiment according to Fig. 7;

Fig. 11 shows the principle arrangement of vertical columns for the embodiment according to Fig. 5;

25 Fig. 12 shows the principle arrangement for transversal columns for the embodiment according to Fig. 5;

Fig. 13 shows the principle arrangement for vertical columns for the embodiment according to Fig. 6;

30 Fig. 14 shows the principle arrangement of transversal columns for the embodiment according to Fig. 6;

Fig. 15 shows the principle arrangement for vertical columns for the embodiment according to Fig. 7; and

Fig. 16 shows the principle arrangement of transversal columns for the embodiment according to Fig. 7.

Fig. 1 has been explained with reference to the prior art in order to explain the background of the invention. Therefore, the above explanations with regard to Fig. 1 apply to the invention as well.

Fig. 2 shows a schematic representation of a product code scheme for RLL parity-check coding. Successive sections 8 to 13 of the RLL encoded binary (d,k) channel bitstream 3 are aligned underneath each other so that a two-dimensional array is generated. The direction of a (d,k) channel bitstream is indicated by a horizontal arrow 14. It is noted, that this (d,k) channel bitstream (preferably after a 1T-precoder, being an integrator modulo 2) is preferably recorded consecutively in a one-dimensional way on a storage medium, e.g. in a spiral way on a disc. Therefore, the two-dimensional illustration according to Fig. 1 does not imply that the bits of the (d,k) channel bitstream are necessarily arranged in such a two-dimensional way on a storage medium. The two-dimensional illustration only serves to realize the product-code structure with parity-check coding along orthogonal directions.

However, in view of the two-dimensional illustration each of the above mentioned sections 8 to 13 can be regarded as individual rows of RLL encoded binary (d,k) channel bits and are therefore hereinafter called RLL rows 8 to 13. For each RLL row 8 to 13, parity-check coding is applied on the (d,k) channel bitstream 3. Thus, a so-called row parity-check row parity-check enabling channel word 15 to 20 is applied for each RLL row 8 to 13, hereby constituting a row parity-check codeword for each of the RLL rows 8 to 13. The row parity-check enabling channel words are located at predetermined positions, not necessarily the same in each row; only for the purpose of simplicity, they are all aligned at the end of the rows in Fig. 2.

This can be done either by appending such row parity-check enabling channel words 15 to 20 at a certain position of such an RLL row 8 to 13, e.g. at the end of an RLL row 8 to 13, as e.g. being described in P. Perry, M.-C. Lin, Z. Zhang, "Runlength-Limited Codes for Single Error-Detection with Mixed Type Errors", IEEE Trans. Inform. Theory, vol. 44, 1998, pp. 1588-1592, or with a combi-code scheme, where the last encoded user-word (byte) realizes the corresponding parity-check constraint, called row-based parity-check constraint, as being described in W.M.J. Coene, H.P. Pozidis, J.W.M. Bergmans, "Runlength Limited Parity-Check Coding for Transition-Shift Errors in Optical Recording", Proceedings of Globecom 2001, Paper SPS01_6, San Antonio (USA), Nov. 25-29, 2001.

For detection of single SBTSEs the row-based parity-check constraint p_{2H} is used, that is:

$$p_{2H} = \text{Mod} \left[\sum_{i=0}^{N-1} i \cdot b_i, 2 \right] = 0 \quad (1)$$

5

with b_i being successive bits of the (d,k) channel bit stream of a certain RLL row and N being the number of successive bits of the (d,k) channel bitstream of that RLL row.

The parity-check coding along the RLL rows enables to detect the occurrence of a single SBTSE error.

10 However, for location of the error a further information is needed. Therefore, for location of the error a further parity-check constraint is applied, namely a column-based or vertical parity-check constraint with error-detecting capability. This column-based parity-check constraint is realized by a number of K (in the example of Fig. 2 of $K = 2$) column parity-check rows 21, 22 that are added to a group of M RLL rows 8 to 13. Each of these K column parity-check rows 21, 22 comprises a plurality of column parity-check enabling channel words 30 that may be arranged as described hereinafter with reference to Fig. 11 to 16. Each of these column parity-check enabling channel words 30 is allocated to a certain row-part of corresponding width of each of the M RLL rows 8 to 13, which are called corresponding row-column intersections (corresponding segments) 24 to 29. The width of such a column parity-check enabling channel word 30 or such a corresponding row-column intersection 24 to 29 can be one or more than one bit (L bits).

25 Thus, if the corresponding row-column intersections 24 to 29 that correspond to a specific column parity-check enabling channel word 30 are located at the same position within an RLL row 8 to 13 as the column parity-check enabling channel word 30 in the column parity-check row 21, 22, a column 23 of vertical orientation is generated, comprising M (or $M + 1$) corresponding row-column intersections 24 to 29 and at least one column parity-check enabling channel word 30 that is either located at one of the column parity-check rows 21, 22 (cf. Fig. 7, 9, 10, 15, 16) or spread over a number, preferably all K column parity-check rows 21, 22 (as being illustrated in Fig. 2, 5, 6, 11-14).

30 Fig. 3 shows a single SBTSE event that has occurred in an erroneous row 31. Therefore, decoding of the row-based parity-check indicates the position of this erroneous row 31. Furthermore, this error event has occurred in an erroneous column 32. Therefore, decoding of the column-based parity-check indicates the position of this erroneous column

32. As a result, the error event is located at the crossing point 33 of the erroneous row 31 and the erroneous column 32. Thus, the corresponding erroneous RLL word at the row-column intersection can be located easily. If the segment width is 1 bit, then the corresponding bit can be easily corrected as well.

5 In case of a single SBTSE, however, two neighbouring bits are affected in the d,k bitstream. Thus, two neighbouring columns are indicated as being erroneous. Thus, both erroneous bits of the (d,k) channel bitstream occurring by such a single SBTSE can easily be located and corrected.

For two independent random errors in the product code scheme for RLL parity-check coding, the situation is more complicated. Fig. 4 shows two error events 34, 35 leading to the detection of erroneous rows 38 and 39 as well as erroneous columns 40, 41. The detection of two erroneous rows and columns each, results in four crossing points. It is assumed as a practical example that for each row (or column) only a single error can be detected, so that both errors must be in different rows and different columns. Then, it is
15 apparent that only two possible corrections can be applied, arranged along the diagonals of the 2×2 set of crossing points.

In general, for r random errors in the product code scheme for RLL parity-check coding, there are $r! = 1 \cdot 2 \cdot 3 \cdot \dots \cdot r$ possible solutions.

In order to select the correct solution, namely which correction pattern has to
20 be chosen, channel side-information is used. For instance, information from the phase-errors of the transitions in the bipolar bitstream can be used, as described above. However, only the phase-errors of those transitions of the RLL-words located at the intersections of rows and columns that have been identified to be erroneous as a result of the decoding of the parity-check along columns and along rows and thus, only a very small amount of channel side-
25 information is needed. Note that no channel side-information at all is needed for the case with exactly one erroneous column and one erroneous row in the group (or cluster) of rows.

We assume now a situation where the width of a column is exactly one bit. Note that although the RLL-rows satisfy the d,k RLL constraints, the 1-bit wide columns generated in the group (or cluster) of rows do not satisfy any RLL constraint. According to an
30 embodiment of the present invention the parity of the bits along each column are used as a column parity-check. This requires one extra user-bit per column, which implies $1/R$ channel bits with R being the rate of the runlength-limited (RLL) code with its d,k constraints. For instance, for $R = \frac{1}{2}$ (and $d = 2$), this requires two channel bits per column for the column parity-check segment. These bits are arranged into two successive rows, where parity "0" is

e.g. realized with “00” or “11” as channel bits in the successive row location, and parity “1” is e.g. realized with “01” or “10” as channel bits in the successive row locations. An alternative choice could be that parity “0” is realized with “01” or “10” and parity “1” with “00” or “11”.

5 Fig. 5 illustrates this situation for column parities “1”, “1”, “1”, “1” yielding e.g. parity-check segments 42 “01”, “10”, “01”, “10” in the two column parity-check rows 21, 22.

10 A problem arises when, as illustrated in Fig. 5, successive vertical parities “1” are needed in successive (1-bit wide) columns. This leads to the pattern depicted in Fig. 5 which automatically excludes all d -constraints larger than $d = 1$.

Fig. 6 shows a solution for this problem wherein the vertical parity, e.g. “1”, is encoded either for only the even-numbered (1-bit wide) columns, or for only the odd-numbered (1-bit wide) columns. I.e. every second bit in the column parity-check rows 21, 22 is not used for parity-check purposes.

15 As a SBTSE will always affect two neighbouring columns (that are 1-bit wide), it is sufficient to pinpoint only one of these two columns. After an erroneous column is detected it has to be decided whether the other erroneous column is positioned to the left or to the right of the detected erroneous column. The decision whether the other erroneous column is positioned to the left or to the right is based on channel side information.

20 The channel bits “x” of the 1-bit wide columns for which no vertical parity is encoded may be used as merging bits in order to realize the (d,k) constraints of the RLL code and/or for DC-control of the channel bitstream, this for each of the column-parity-check rows. Note that DC-control is based on keeping the running digital sum within certain bounds, wherein the running-digital sum is the integration of the bipolar channel bitstream up to a certain bit position. The integration for the running digital sum evolves in the horizontal
25 “row” direction, and has to be evaluated first for the 1st row, and then successively for the next column-parity-check rows.

As can be taken from Fig. 6 which shows the configuration of the channel bits in the columns, up to a $d = 3$ constraint can be realized.

30 However, as the two column parity-check rows 21, 22 are encoded simultaneously, column after column, it is difficult to enable DC-control for the second row 22, because, for the second row, DC-control depends on the information encoded in the first row 21 and both rows 21, 22 are encoded simultaneously.

According to a further embodiment of the present invention, shown in Fig. 7, at least two column parity-check rows 43, 44 in addition to M RLL rows 8 to 13 are needed to realize the column-based parity-check coding. Each RLL row 8 to 13 as well as each column parity-check row 43, 44 is partitioned into alternating segments of width N_1 and N_2 channel bits. N_1 and N_2 are preferably, but not necessarily, unequal to each other, depending on the number of N RLL channel bits per row.

In the first additional column parity-check row 43 the vertical parity-check information is computed over $M + 1$ rows into the odd-indexed segments of length N_1 . This parity-check information is denoted by parity (a) in Fig. 7. In the second additional row 44, the vertical parity-check information is computed over $M + 2$ rows, including the first column parity-check row 43, which has a merging area 49 (indicated by hatched segments) at this location, into the even-indexed segments of width N_2 . This is denoted by parity (b) in Fig. 5.

It is noted, that also parity (b) may be computed over $M + 1$ rows only, namely by excluding the first parity row 43 having a merging area 49 at this location. However, preferably, the parity-check segment parity (b) of the second column parity-check row 44 takes into account the RLL bitstream of the merging segment 49 of the first column parity-check row 43.

Thus, a so-called zig-zag scheme is used over the segments in the two additional column parity-check rows 43, 44 for encoding the vertical parity-check information, and hereby realizing the product code scheme for RLL parity-check coding.

The even segments in the first additional row 43, namely the merging segments 49, do not contain any coded information, but are used for concatenation purposes, in particular for prohibiting violation of the (d, k) constraints and for DC-control. Similarly, the odd segments of the second additional row 44, namely merging segments 50, do not contain any coded information, but are used for concatenation purposes, e.g. prohibiting violation of the (d, k) constraints and for DC-control (in the second row).

One practical advantage of the zig-zag scheme is the fact, that the RLL coding can be done in a row-after-row fashion, which makes this scheme suitable for DC-control on the column parity-check rows via proper selection of the channel words in the merging segments 49.

The vertical or column-based parity-check coding for a single column is described next. The first (ODD) column is N_1 bits wide. For these N_1 bits, there are in general $N_{dk}(N_1)$ possible sequences that are consistent with the (d, k) constraints. For simplicity it is

assumed that $N_1 \leq k$, so that only the d -constraint has to be considered for the number of possible sequences, which is then $q_1 = N_d(N_1)$.

Similarly, for the second (EVEN) column, that is N_2 bits wide, it is assumed that $N_2 \leq k$, so that the number of possible sequences with width N_2 channel bits is $q_2 = N_d(N_2)$.

The following table 1 shows the number $q_1 = N_d(N_1)$ of possible sequences as a function of width N_1 bits for minimum runlength constraint $d = 1$.

Table 1

N_1	0	1	2	3
	4			
possible sequences	by definition	0 000 1 1000 010 100 101 0001 1001 0101	0 0000 01 10 0100 0010 1010	00 001 10
$q_1=N_d(N_1)$	1	2	3	5
	8			

Number $q_1=N_d(N_1)$ of possible sequences as a function of width N_1 bits for minimum runlength constraint $d=1$

In more general the number $q_1 = N_d(N_1)$ of possible sequences of width N_1 bits is given according to table 2 with the minimum runlength constraint d as a parameter for $d = 1, \dots, 5$ and $N_1 = 0, 1, 2, \dots, 14$.

5 Table 2

	N_1	0	1	2	3	4	5	6	7	
			8	9	10	11	12	13	14	
d										
1		1	2	3	5	8	13	21	34	55
2			89	144	233	377		610	987	
3		1	2	3	4	6	9	13	19	28
4			41	60	88	129		189	277	
5		1	2	3	4	5	7	10	14	19
			26	36	50	69	95	131		
		1	2	3	4	5	6	8	11	15
			20	26	34	45	60	80		
		1	2	3	4	5	6	7	9	12
			16	21	27	34	43	55		

Number $q_1 = N_d(N_1)$ of possible sequences as a function of width N_1 bits for a minimum runlength constraint d as a parameter

10 Similar values apply for the second (even) columns with N_2 bits width wherein the number of possible sequences is $q_2 = N_d(N_2)$, i.e. tables 1 and 2 can be used by replacing index "1" by index "2".

Via enumerative coding (cf. e.g. K.A. Schouhamer Immink, "Codes for Mass Data Storage Systems", Schannon Foundation Publishers, The Netherlands, 1999, Chap. 6)

15 for each different sequence of length N_1 , called word W_j in row j , with its N_1 (d, k)-bits denoted by b_i^j , a unique index w_j is associated with $0 \leq w_j \leq q_1 - 1$, given by

$$w_j = \sum_{i=0}^{N_1-1} b_i^j \cdot N_d(i) \quad (2)$$

The following table 3 illustrates the calculation of the unique index w_j for the words W_j for the example of a width $N_1 = 4$ bits and $d = 1$.

5 Table 3

W_j	$w_j(W_j)$
0000	$0 \cdot 1 + 0 \cdot 2 + 0 \cdot 3 + 0 \cdot 5 = 0$
1000	$1 \cdot 1 + 0 \cdot 2 + 0 \cdot 3 + 0 \cdot 5 = 1$
0100	$0 \cdot 1 + 1 \cdot 2 + 0 \cdot 3 + 0 \cdot 5 = 2$
0010	$0 \cdot 1 + 0 \cdot 2 + 1 \cdot 3 + 0 \cdot 5 = 3$
1010	$1 \cdot 1 + 0 \cdot 2 + 1 \cdot 3 + 0 \cdot 5 = 4$
0001	$0 \cdot 1 + 0 \cdot 2 + 0 \cdot 3 + 1 \cdot 5 = 5$
1001	$1 \cdot 1 + 0 \cdot 2 + 0 \cdot 3 + 1 \cdot 5 = 6$
0101	$0 \cdot 1 + 1 \cdot 2 + 0 \cdot 3 + 1 \cdot 5 = 7$

Word $W_j = (b_0^j, b_1^j, b_2^j, \dots, b_{N_1-1}^j)$ in row j with N_1 bits b_i^j having

unique index $w_j = \sum_{i=0}^{N_1-1} b_i^j \cdot N_d(i)$ for $N_1=4$ bits,

10 i.e. $W_j = (b_0^j, b_1^j, b_2^j, b_3^j)$ and $w_j = \sum_{i=0}^3 b_i^j \cdot N_d(i)$

As there are M RLL rows 8 to 13, for the first (ODD) column a N_1 bits wide extra word (or segment, at the row-column intersection) for row $M + 1$, namely the first column parity-check row 43 is generated, so that the following vertical or column-based

15 parity-check condition (denoted by V , and being a number between 0 and q_1) is satisfied:

$$V = \text{Mod} \left[\sum_{j=1}^{M+1} w_j, q_1 \right] = 0 \quad (3)$$

In this sense, the extra word is a column parity-check enabling channel word. A similar situation applies for the case of the second (EVEN) column, with a width of N_2 channel bits. Thus, a unique index w_j , with $0 \leq w_j \leq q_2-1$ for each word W_j with a width of N_2 bits is given by:

20

$$w_j = \sum_{i=0}^{N_d-1} b_i^j \cdot N_d(i) \quad (4)$$

5 The vertical or column-based parity-check condition may be either calculated as for the above first (ODD) column as given by equation (3). Alternatively this vertical or column-based parity-check condition is calculated by computing the vertical parities over $M + 2$ rows, yielding:

$$V = \text{Mod} \left[\sum_{j=1}^{M+2} w_j, q_2 \right] = 0 \quad (5)$$

10

Assumed that an SBTSE has occurred in one of the segments or words W_j of the considered (ODD or EVEN) column. Then three different situations have to be distinguished:

15 1. First situation:

The transition shift of the SBTSE is completely internal within the corresponding segment. The transition shift does not involve any shifts over the segment boundaries. The transition can be either to the right ($i \rightarrow i + 1$), or to the left ($i \rightarrow i - 1$).

20 A shift-error to the right in a segment consisting of word W_j (with width of N_1 bits) with the word index w_j according to equation (2) may be illustrated as:

$$b_i^j b_{i+1}^j = 10 \Rightarrow b_i^{j'} b_{i+1}^{j'} = 01 \quad (6)$$

25 Such a shift-error results in a variation Δw_j of the as-detected word index w_j

$$\Delta w_j = w_j' - w_j = N_d(i+1) - N_d(i) \quad (7)$$

and thus of the as-detected vertical parity-check value

30

$$V_{\text{as-detected}} = \Delta w_j \neq 0 \quad (8)$$

Thus, the as-detected value of V becomes:

$$V_{\text{as-detected}} = N_d(i \pm 1) - N_d(i) \quad (9)$$

5

wherein $N_d(i - 1)$, $N_d(i)$, $N_d(i + 1)$ are determined e.g. according to table 1 or 2, and where the “+” refers to a transition-to-the-right, and the “-” refers to a transition-to-the-left.

10

Thus, a SBTSE is determined internal of such a segment, namely

- a) a transition-shift error is determined from bit position i to the right to bit position $i + 1$, if the detected column-based parity-check constraint is detected as

$$V_{\text{as-detected}} = N_d(i + 1) - N_d(i) \quad (10)$$

15 and

- b) a transition-shift error is determined from bit position i to the left to bit position $i - 1$, if the detected column-based parity-check constraint is detected as

$$V_{\text{as-detected}} = N_d(i - 1) - N_d(i) \quad (11)$$

20

2. Second situation:

25 A second situation occurs, if the transition shift crosses the left boundary of the segment as being indicated in Fig. 8 for column 2. The original transition-bit can be either in the present column (column 2) or in the previous column (column 1). For the V -criterion of the present column, this leads to as-detected values $V = \mp N_d(0)$, and for the previous column, this leads to as-detected values $V = \pm N_d(N_1 - 1)$ assuming that the previous column has segments with a width of N_1 bits.

30 Thus, a SBTSE is determined crossing the left boundary of such a segment, namely

- a) a transition-shift error is determined from the last bit position of the previous segment to the first bit position of the present segment, if the detected column-based parity-check constraint is detected for the present column as

$$V_{\text{as-detected, present}} = +N_d(0) \quad (12)$$

and if the detected column-based parity-check constraint is detected for the previous column
as

$$V_{\text{as-detected, previous}} = -N_d(N_{1,2} - 1) \quad (13)$$

where $N_{1,2}$ is the number of bits within a segment of the left-hand side (or previous) column
(in Fig. 8, this number has been chosen to be equal to N_1), or

b) a transition-shift error is determined from the first bit position of the present
segment to the last bit position of the previous segment, if the detected column-based parity-
check constraint is detected for the present column as

$$V_{\text{as-detected, present}} = -N_d(0) \quad (14)$$

and if the detected column-based parity-check constraint is detected for the previous column
as

$$V_{\text{as-detected, previous}} = +N_d(N_{1,2} - 1) \quad (15)$$

3. Third situation:

A third situation occurs if the transition shift crosses the right boundary of the
segment. This can be shown to be a straightforward extension of the second situation, but for
the sake of completeness this situation is also described in full detail. Then, the original
transition-bit can be either in the present column, or in the subsequent column. For the V -
criterion of the present column, this leads to as-detected values $V = \mp N_d(N_2 - 1)$, and for the
subsequent column this leads to as-detected values $V = \pm N_d(0)$, assuming that the present
column has segments with a width of N_2 bits.

Thus, a SBTSE is determined crossing the right boundary of a segment,
namely

a) a transition-shift error is determined from the last bit position of the present segment to the first bit position of the subsequent segment, if the detected column-based parity-check constraint is detected for the present column as

$$V_{\text{as-detected, present}} = -N_d(N_{1,2} - 1) \quad (16)$$

where $N_{1,2}$ is the number of bits within a segment of the left-hand side (or present) column, considering the subsequent column to be equal to the right-hand-side column, and if the detected column-based parity-check constraint is detected for the subsequent column as

$$V_{\text{as-detected, subsequent}} = +N_d(0) \quad (17)$$

or

b) a transition-shift error is determined from the first bit position of the subsequent segment to the last bit position of the present segment, if the detected column-based parity-check constraint is detected for the present column as

$$V_{\text{as-detected, present}} = +N_d(N_{1,2} - 1) \quad (18)$$

and if the detected column-based parity-check constraint is detected for the subsequent column as

$$V_{\text{as-detected, subsequent}} = -N_d(0) \quad (19)$$

The error correction for the case of an independent column error is described next.

It is assumed that an internal error in a column has occurred as described above with reference to the first situation. The previous and subsequent column may also be independently in error, but the combination of the error-values may not be within the second or third situations, namely for non-internal errors crossing the boundaries of a segment (which have been dealt with extensively in the previous section). By evaluation of the V parity-check criterion, for non-zero values of the as-detected V , it can be detected that an error has occurred in the column. By checking for which row an erroneous horizontal or row-

based parity-check was detected, the segment consisting of word W_j can be located in which the error has occurred.

After error location at the proper row-column intersection of the row identified to be erroneous by the row-parity-check decoding, and of the column identified to be erroneous by the column-parity-check decoding, we need to perform error-correction. There is more than a single procedure for error-correction.

As a first embodiment, we describe a procedure to pinpoint the erroneous 1-bit that has been shifted. In all embodiments, it is assumed that random errors which lead to violations of the d constraint have already been corrected. Such correction procedure in the bit-detection is known as run-detector or runlength-push back detector, as described in G. J. van den Enden, "Transmission System and Recording System having a Simplified Symbol Detector", European Pat. No. EP0885499, issued Dec. 23, 1998; and in T. Nakagawa, H. Ino and Y. Shimpuku, "A Simple Detection Method for RLL Codes (Run Detector)", IEEE Trans. Magn., Vol. 33, no. 5, pp. 3263-3264, Sept. 1997. This implies that the channel words in all segments are consistent with the d constraint, since all violations have been removed.

If more than a single "1"-bit occurs in the word, it is still possible to pinpoint the erroneous transition, since the as-detected V -values are representative for the "1"-bit that is shifted. If $V < N_d(N_1)/2$, then a right shift has occurred. In case $V > N_d(N_1)/2$, a left shift has occurred. As an example the case is considered for $d = 2$, $k = 10$, and $N_1 = k = 10$, for which $q_1 = N_d(N_1) = 60$.

Table 4 shows the as-detected vertical parity-check criterion $V_{\text{as-detected}}$ as a function of the position i of a shifted transition for a right-shift error and $d=2$, $k=10$, $N=10$, $N_{d=2}(N=10)=60$

Table 4

i	0	1	2	3	4	5	6	7	8
$V_{\text{as-detected}}$	+1	+1	+1	+2	+3	+4	+6	+9	+13

Correspondingly, the as-detected vertical parity-check criterion $V_{\text{as-detected}}$ can be obtained for a left-shift error according to table 5 as follows:

Table 5

20

i	1	2	3	4	5	6	7	8	9
$V_{\text{as-detected}}$	-1	-1	-1	-2	-3	-4	-6	-9	-13

The values according to tables 4 and 5 are obtained from table 2 for the case of $d = 2$ by computing the difference values between two neighboring values within line $d = 2$.

5 Thus, the as-detected V values for right-shifting SBTSE errors and for the left-shifting SBTSE errors are given by:

$$V_{\text{as-detected}} = \pm 1, \pm 1, \pm 1, \pm 2, \pm 3, \pm 4, \pm 6, \pm 9, \pm 13 \quad (20)$$

10 At a first glance, it seems that the first three cases ($V_{\text{as-detected}} = \pm 1, \pm 1, \pm 1$) cannot be distinguished, because they lead to same V -values. However, for right-shifting SBTSE, the first three “+1”s according to equation 20, for instance, indicate, that a transition in the first four bits (except the first bit) should be back-shifted to the left. Hence the detected bit-patterns are (with | indicating the word boundary at the left of a segment):

15 |0100 ---,
 |0101 --- (with the second bit to be shifted back to the left for correction),
 |0010 --- (with the third bit to be shifted back to the left for correction), and
 |0001 --- (with the fourth bit to be shifted back to the left for correction).

20 These four cases lead un-ambiguously to the following corrected words (for the case of $d = 2$), respectively:

25 |1000 ---,
 |1001 ---,
 |0100 ---,
 |0010 ---.

30 Thus, no ambiguity is left about which transition is to be corrected in the word at the crossing point of an erroneous row and an erroneous column (error-location at row-column intersection). Note that for the practical case considered here ($d = 2$), the second

situation does not occur in case the run-detector as described above has removed all $d=2$ violations.

The correction procedure, however, can be made more general. This is a second embodiment for error-correction. It is assumed that by using the row-based parity-check, a segment consisting of the word W_j has been located to be the erroneous segment in the erroneous column. Further, it is assumed that the original word index was w_j , and that the as-detected word index is w_j' . Then, the as-detected value of the vertical or row-based parity-check is:

$$V_{\text{as-detected}} = \Delta w_j = w_j' - w_j \quad (21)$$

and the corrected index for this segment is given by:

$$w_j = w_j' - V_{\text{as-detected}} \quad (22)$$

Preferably the width of the columns (or segments) is made as narrow as possible, since this allows for a more dense two-dimensional grid to carry out the two-dimensional error-location and correction. A more dense grid enables a better error-correction performance of the product code scheme for RLL parity-check coding. The minimum width of a column is given by d channel bits, which is the minimum number of bits needed as merging bits between any two other segments or words. The maximum width is given by k . Thus, the widths N_1, N_2 are given by

$$d \leq N_{\langle 1,2 \rangle} \leq k \quad (23)$$

For each column either the top or the bottom part can be used as a merging segment. However, as the location of the column parity-check rows 43, 44 is also possible at any position within the group of M RLL rows 8 to 13, the merging segments 49, 50 may also be located within a column.

The error correction for the case of dependent column errors is described next. As being described above with reference to the second and third situations in case of a transition shift crossing the boundary of a segment, two neighboring columns are detected to be erroneous and the column parity-check criterion V of the two columns correspond either to the above second and third situation. Such cases are detectable straight forward, because they

lead to the above described typical error patterns with the above mentioned V values. Therefore, the corresponding bits at the boundaries of the detected columns can be shifted correspondingly.

Fig. 9 shows a single SBTSE event for a coding scheme according to Fig. 7. A single SBTSE has occurred in an erroneous segment 51 being located in an erroneous row 52 and in an erroneous column 53. The erroneous row 52 is determined by the corresponding row parity-check criterion. The erroneous column 53 is determined by the corresponding column parity-check criterion. Thus, an error event according to the above described first situation occurred. This error event is corrected as described above with reference to this first situation. It is noted, that no channel side-information has to be used for detection and/or correction of the corresponding erroneous segment 51 and in particular the corresponding erroneous bit in this segment 51.

Fig. 10 shows the case for two independent SBTSEs 54, 55. As described above with reference to Fig. 4 the two errors 54, 55 cannot be distinguished from the situation that errors would have appeared in the segments relating to crossing points 56, 57. In order to select the correct solution, channel side-information is used again. It is noted, that channel side-information is only needed for the transitions indicated by the segments related to the crossing points 56, 57 and the segments related to the crossing points relating to SBTSEs 54, 55. Thus, only a small amount of channel side-information is used.

In conclusion the invention proposes different schemes for incorporating a product code scheme consisting of parity-check codes for a (d, k) channel bitstream. These different schemes are illustrated with reference to Fig. 11 to 16. In each of these Figs. 11 to 16 a group of M RLL rows (each representing an RLL parity-check code-word with a given parity-check constraint) 45 is followed by a group of K of column parity-check rows 46.

In Fig. 11 columns 47 are constituted at every bit position of the (d, k) channel bitstream. The widths of these columns 47 is therefore one bit. Each column 47 comprises one column parity-check enabling channel (RLL) word or segment 48 at its bottom end and a number of M corresponding segments in the M RLL rows.

Preferably at the end of each row, but possibly everywhere else in a row, a row parity-check enabling channel (RLL) word (not shown) is provided for realizing a row-based parity-check constraint, hereby constituting a row parity-check codeword.

Fig. 12 shows the same code as shown in Fig. 11, however, the columns 47 are not arranged vertically, but transversely, which is possible as well.

We focus now on the special case that a column is only one-bit wide. This implementation really differs from the zig-zag implementation, where the width of the columns should not be smaller than d . Fig. 13 shows a code quite similar to Fig. 11, however, every second column is omitted for parity checking, i.e. the (d, k) channel bits of these omitted columns are not column-based parity-check encoded. Thus, in the column parity-check rows 46 only every second segment is used as a column parity-check enabling channel word 48. Therefore, column parity-check enabling channel word 48 are provided at every second bit (or column) position only.

Fig. 14 shows a code corresponding to the code of Fig. 13, however, the columns 47 not being vertically oriented, but being transversely oriented.

Fig. 15 is a simplified illustration of the code shown in Fig. 7 (giving a basis for comparing with the code according to Fig. 16), wherein the width of the columns 47 is larger than one bit (at minimum d bits) and wherein the number K of column parity-check rows 46 is two. Thus, each column 47 comprises a column parity-check enabling channel word 48 with a corresponding width as well as corresponding segments of the same width in the M RLL rows 45. However, in each column parity-check row 46 only every second segment is used as a column parity-check enabling channel words 48, in a row-wise interleaved way, wherein the segments inbetween such column parity-check enabling channel words 48 are used as merging segments.

Again, preferably at the end of each RLL row 45 row parity-check enabling channel words (not shown) are provided for realizing a row-based parity-check constraint, hereby constituting a row parity-check codeword.

Fig. 16 shows almost the same code as Fig. 15, however, the columns 47 being arranged transversely instead of vertically.

It is noted, that in the cases of Fig. 13 to 16 only about half of the segments within the column parity-check rows 46 are used as column parity-check enabling channel words, whereas the other segments are used as merging segments.

Summarized, the invention improves the random-error performance of the channel, preferably being embodied as a optical, magnetic, or magneto-optical storage medium by using a parity-check RLL code combined with a product code, thus reducing the need to use a channel side-information for the purpose of error-location considerably.

Note that in the above description, we have made the convention that "rows" correspond with the direction along which the RLL code is realized. However, the invention

allows also to exchange rows for columns and vice versa, thereby, still realizing the same idea.

CLAIMS:

1. A signal comprising a runlength limited (RLL) encoded binary d,k channel bitstream, wherein parameter d defines a minimum number and parameter k defines a maximum number of zeroes between any two ones of said bitstream or vice versa, comprising
5 a number of sections of respectively N successive RLL channel bits, called RLL rows, each RLL row representing a parity-check code-word, called row parity-check code-word, in which a so-called row-based parity-check constraint for said RLL row has been realized; characterized in that
 K sections of respectively N successive channel bits, called column parity-check rows, are
10 located at predetermined positions of a group of M RLL rows, K , N and M being integer values, said column parity-check rows comprising a plurality of column parity-check enabling channel words,
wherein each of said column parity-check enabling channel words realizes a so-called column-based parity-check constraint for all so-called corresponding segments of at least said
15 M RLL rows of said group that correspond to a specific column parity-check enabling channel word, hereby constituting a column parity-check codeword.
2. A signal according to claim 1, characterized in that the number K of column parity-check rows is at least 2.
20
3. A signal according to claim 1, characterized in that each one of said row parity-check code-words comprises a row parity-check enabling channel word being appended to RLL encoded user data without itself containing user data.
- 25 4. A signal according to claim 1, characterized in that each one of said row parity-check code-words comprises a row parity-check enabling channel word being encoded user data.

5. A signal according to claim 1, characterized in that each of said row parity-check code-words comprises a parity-check bit p_{2H} realizing the row-based parity-check constraint

$$p_{2H} = \text{Mod} \left[\sum_{i=0}^{N-1} i \cdot b_i, 2 \right]$$

5 which is at an encoder set to a predetermined value, known at a decoder, that is, it is either set to 0 or to 1, with b_i being successive bits of said d,k channel bitstream of an RLL row.

6. A signal according to claim 1, characterized in that said corresponding segments of RLL rows being respectively a certain bit at a predetermined position of each of
10 said RLL rows and a respective single-bit wide column parity-check enabling channel word or words is or are located at the same position of each of said K column parity-check rows.

7. A signal according to claim 6, characterized in that the number K of column parity-check rows is an integer value with $K \geq 1/R$, with R being the code rate of the RLL
15 code with RLL constraints d and k .

8. A signal according to claim 7, characterized in that each of said single-bit wide column parity-check enabling channel words is an encoded symbol of a parity-check bit p_{2V} realizing the column-based parity-check constraint

20
$$p_{2V} = \text{mod} \left[\sum_{l=0}^{M+K-1} b_l, 2 \right]$$

which is at the encoder set to a predetermined value, known at the decoder, that is, either set to 0 or to 1, with b_l being bits of the RLL rows of said group at a certain position, wherein the bits of said symbol are spread over said K column parity-check rows, one bit per row.

25 9. A signal according to claim 8, characterized in that said symbol is selected from a number of different symbols realizing said column-based parity-check constraint p_{2V} in order to realize the d,k constraints of the RLL code within said column parity-check rows as well.

30 10. A signal according to claim 6, characterized in that said single-bit wide column parity-check enabling channel words are located at each channel bit position of a

column parity-check row, hereby constituting at every bit-wide column a column parity-check codeword.

11. A signal according to claim 6, characterized in that said single-bit wide
5 column parity-check enabling channel words are located at every second channel bit position only, hereby constituting at every second bit-wide column a column parity-check codeword.

12. A signal according to claim 11, characterized in that channel bits between said
10 second bit positions are used as merging bits in order to realize said d, k constraints of said RLL code and/or any desired spectral property of the code like DC-control.

13. A signal according to claim 1, characterized in that said predetermined
position of a row parity-check enabling channel word is at the end of an RLL row.

15 14. A signal according to claim 1, characterized in that said K column parity-check rows are arranged successively.

15. A signal according to claim 1, characterized in that said M RLL rows are
20 arranged successively.

16. A signal according to claim 1, characterized in that said predetermined
position of said K column parity-check rows is at the end of said group.

17. A signal according to claim 1, characterized in that said predetermined
25 position of said K column parity-check rows is in front of said group.

18. A signal according to claim 1, characterized in that said predetermined
position of said K column parity-check rows is within said group.

30 19. A signal according to claim 1, characterized in that the number K of column parity-check rows is two,
each of said column parity-check rows is divided into segments of at least two types, and in the case of two types, of more than one successive channel bits of alternating

segment width N_1 or N_2 , N_1 and N_2 being integer values, N_1 being the width of the first column parity-check segment and N_2 being the width of the second parity-check segment, wherein in each column parity-check row only every second segment is a column parity-check enabling channel word and

5 wherein only one of both column parity-check rows starts with a column parity-check enabling channel word,

whereas in the other column parity-check row the first column parity-check enabling channel word is at the second segment position.

10 20. A signal according to claim 19, characterized in that within each column parity-check row the so-called merging segments in front of or behind a column parity-check enabling channel word do not contain any user data, but are designed such to realize said d, k constraints of said RLL code and/or any desired spectral property of the code like DC-control.

15 21. A signal according to claim 19, characterized in that in the first one of both column parity-check rows the parity-check information of each column parity-check enabling channel word realizes said parity-check constraint only for said column parity-check enabling channel word in addition to said corresponding segments of said M RLL rows of said group.

20 22. A signal according to claim 21, characterized in that in the second one of both column parity-check rows the parity-check information of each column parity-check enabling channel word realizes said parity-check constraint only for said column parity-check enabling channel word in addition to said corresponding segments of said M RLL rows of said group.

25 23. A signal according to claim 21, characterized in that in the second one of both column parity-check rows the parity-check information of each column parity-check enabling channel word realizes said parity-check constraint for said column parity-check enabling channel word as well as the corresponding merging segment of said first column parity-check
30 row in addition to said corresponding segment of said M RLL rows of said group.

24. A signal according to claim 19, characterized in that said segment or channel word widths N_1 and N_2 are in the range of $d \leq N_{1,2} \leq k$.

25. A signal according to claim 21 or 22, characterized in that said parity-check constraint is

$$V = \text{Mod} \left[\sum_{j=1}^{M+1} w_j, q_1 \right]$$

being set to a predetermined value at the encoder, known at the decoder, and is preferably set

5 to 0, wherein j is a unique index associated with each RLL row for $1 \leq j \leq M$ and an index associated with the actual column parity-check row for $j = M + 1$, and

wherein w_j is a unique index associated with each word W_j which defines one of a number of possible d,k constrained sequences of said segment width (N_1, N_2) , wherein such a word W_j is comprised in each corresponding segment.

10

26. A signal according to claim 23, characterized in that said column based parity-check constraint is

$$V = \text{Mod} \left[\sum_{j=1}^{M+2} w_j, q_1 \right]$$

being set to a predetermined value at the encoder, known at the decoder, and is preferably set

15 to 0, wherein j is a unique index associated with each RLL row for $1 \leq j \leq M$ and with each column parity-check row for $j = M + 1, M + 2$, and wherein w_j is a unique index associated with each word W_j which defines one of the a number of possible d,k constrained sequences of said segment width (N_1, N_2) , wherein such a word W_j is comprised in each corresponding segment.

20

27. A signal according to claim 25 or 26, characterized in that said unique index w_j is

$$w_j = \sum_{i=0}^{N_{1,2}-1} b_i^j \cdot N_d(i)$$

wherein b_i^j denotes bit number i of word W_j in row j and wherein $N_d(i)$ is the number of
25 possible d,k constrained sequences of length i .

28. A signal according to claim 1, characterized by a waveform comprising said d,k channel bitstream, wherein said waveform transitions between two states (land, pit) whenever a one occurs in said d,k channel bitstream and keeps its actual state whenever a
30 zero occurs in said d,k channel bitstream or vice versa.

29. A storage medium storing a signal according to any one of claims 1 to 28.

30. A storage medium according to claim 29, characterized in that said storage
5 medium is a recorded optical, magnetic, or magneto-optical disc or recoded magnetic tape.

31. A method for encoding a stream of user data bits comprising the steps of:
runlength limited (RLL) encoding said stream of user data bits into a binary d,k channel
bitstream comprising a number of sections of respectively N successive RLL channel bits,
10 called RLL rows, wherein parameter d defines a minimum number and parameter k defines a
maximum number of zeroes between any two ones of said bitstream or vice versa,
each RLL row representing a parity-check code-word, called row parity-check code-word in
which a so-called row-based parity-check constraint for said RLL row has been realized,
characterized by the further step of
15 generating K sections of respectively N successive channel bits, called column parity-check
rows, at predetermined positions of a group of M RLL rows, K , N and M being integer
values, said column parity-check rows comprising a plurality of column parity-check
enabling channel words,
wherein each of said column parity-check enabling channel words realizes a so-called
20 column-based parity-check constraint for so-called corresponding segments of at least said M
RLL rows of said group that correspond to a specific column parity-check enabling channel
word, hereby constituting a column parity-check codeword.

32. A method according to claim 31, characterized by generating a signal
25 according to any one of claims 1 to 30.

33. A device for encoding a stream of user data bits comprising:
encoding means for runlength limited (RLL) encoding a stream of user data bits into a binary
 d,k channel bitstream comprising a number of sections of respectively N successive RLL
30 channel bits, called RLL rows, wherein parameter d defines a minimum number and
parameter k defines a maximum number of zeroes between any two ones of said bitstream or
vice versa,

wherein each RLL row represents a parity-check code-word, called row parity-check code-word in which a so-called row-based parity-check constraint for said RLL row has been realized,

characterized in that

- 5 said encoding means being designed for generating K sections of respectively N successive channel bits, called column parity-check rows, at predetermined positions of a group of M RLL rows, K , N and M being integer values, said column parity-check rows comprising a plurality of column parity-check enabling channel words, wherein each of said column parity-check enabling channel words realizes a so-called column-based parity-check
- 10 constraint for all so-called corresponding segments of at least said M RLL rows of said group that correspond to a specific column parity-check enabling channel word, hereby constituting a column parity-check codeword.

34. A device according to claim 33, characterized in that said device comprising
- 15 means for performing a method according to claims 31 or 32 in order to generate a signal according to any one of claims 1 to 30.

35. A method for decoding a signal according to any one of claims 1 to 30 or a signal being encoded according to a method of claim 31 or 32, comprising the steps of:
- 20 checking for each RLL row a so-called row-based parity-check constraint,
checking for each column parity-check segment of said column parity-check rows a so-called column-based parity-check constraint along all corresponding segments of at least said M RLL rows that correspond to said column parity-check enabling channel word, and
- 25 determining an erroneous channel word based on said checking steps.

36. A method according to claim 35, wherein said determining step includes locating an erroneous segment at a crossing point of
- a) an erroneous RLL row that violates said row-based parity-check constraint for
- 30 said RLL row and
- b) an erroneous column comprising all corresponding segments that correspond to a specific column parity-check enabling channel word, wherein said column violates said column-based parity-check constraint.

37. A method according to claim 36, wherein an located erroneous segment is corrected if a single erroneous segment occurs.

38. A method according to claim 35, wherein said determining step is further
5 based on channel side-information if more than a single erroneous segment occurs.

39. A method according to claim 38, wherein said channel side-information is phase-error information of bit transitions in the channel words of the segments at said crossing points.

40. A method according to claim 39, wherein a phase-error with the largest absolute value is determined and the corresponding one-bit of the d,k channel bitstream is shifted by one bit position.

41. A method according to claim 35, wherein said signal comprises said column parity-check enabling channel words at every second channel bit position only, and wherein said determining step includes, upon detecting a first erroneous column, the step of deciding whether another erroneous column is positioned to the left or to the right of said first erroneous column.

42. A method according to claim 41, wherein said decision step is based on channel-side information.

43. A method according to claim 35, wherein said signal comprises segments of more than one successive channel bits of alternating segment width N_1 or N_2 , and wherein a single-bit transition-shift error is determined internal of such a segment, namely

a) a transition-shift error is determined from bit position i to the right to bit position $i+1$, if the detected column-based parity-check constraint is detected as

$$V_{\text{as-detected}} = N_d(i+1) - N_d(i)$$

and

b) a transition-shift error is determined from bit position i to the left to bit position $i-1$, if the detected column-based parity-check constraint is detected as

$$V_{\text{as-detected}} = N_d(i-1) - N_d(i)$$

wherein $N_d(i-1)$, $N_d(i)$, $N_d(i+1)$ are the numbers of possible d, k constrained sequences of length $i-1$, i , $i+1$, respectively.

44. A method according to claim 35, wherein said signal comprises segments of more than one successive channel bits of alternating segment width N_1 or N_2 , and wherein a single-bit transition-shift error is determined crossing the left boundary of such a segment, namely

a) a transition-shift error is determined from the last bit position of the previous segment to the first bit position of the present segment, if the detected column-based parity-check constraint is detected for the present column as

$$V_{\text{as-detected, present}} = +N_d(0)$$

and if the detected column-based parity-check constraint is detected for the previous column as

$$V_{\text{as-detected, previous}} = -N_d(N_{1,2} - 1)$$

or

b) a transition-shift error is determined from the first bit position of the present segment to the last bit position of the previous segment, if the detected column-based parity-check constraint is detected for the present column as

$$V_{\text{as-detected, present}} = -N_d(0)$$

and if the detected column-based parity-check constraint is detected for the previous column as

$$V_{\text{as-detected, previous}} = +N_d(N_{1,2} - 1)$$

wherein $N_d(0) = 1$ and $N_d(N_{1,2} - 1)$ is the number of possible d, k constrained sequences of length $N_{1,2} - 1$.

45. A method according to claim 35, wherein said signal comprises segments of more than one successive channel bits of alternating segment width N_1 or N_2 , and wherein a single-bit transition-shift error is determined crossing the right boundary of such a segment, namely

a) a transition-shift error is determined from the last bit position of the present segment to the first bit position of the subsequent segment, if the detected column-based parity-check constraint is detected for the present column as

$$V_{\text{as-detected, present}} = -N_d(N_{1,2} - 1)$$

and if the detected column-based parity-check constraint is detected for the subsequent column as

$$V_{\text{as-detected, subsequent}} = +N_d(0)$$

or

- 5 b) a transition-shift error is determined from the first bit position of the subsequent segment to the last bit position of the present segment, if the detected column-based parity-check constraint is detected for the present column as

$$V_{\text{as-detected, present}} = +N_d(N_{1,2} - 1)$$

- 10 and if the detected column-based parity-check constraint is detected for the subsequent column as

$$V_{\text{as-detected, subsequent}} = -N_d(0)$$

wherein $N_d(0) = 1$ and $N_d(N_{1,2} - 1)$ is the number of possible d,k constrained sequences of length $N_{1,2} - 1$.

- 15 46. A method according to claim 43, wherein a segment with a determined single-bit transition-shift error is corrected by being replaced by a segment having said unique index

$$w_j = w'_j - V_{\text{as-detected}}$$

wherein w'_j is an as-detected index of said segment to be replaced, wherein

$$w'_j = \sum_{i=0}^{N_{1,2}-1} b_i^j \cdot N_d(i)$$

- 20 wherein b_i^j denotes as-detected bit-value for the bit with number i of said segment in row j and wherein $N_d(i)$ is the number of possible d,k constrained sequences of length i .

47. A device for decoding a signal according to any one of claims 1 to 30 or a signal being encoded according to a method of claim 31 or 32, comprising:

- 25 - parity-check means for checking for each RLL row a row-based parity-check constraint, and for checking for each column parity-check enabling channel word of said column parity-check rows a so-called column-based parity-check constraint along all corresponding segments of at least said M RLL rows that correspond to said column parity-check enabling channel word, and
- 30 - determining means for determining an erroneous channel word based on the result of said parity-checking.

48. A device according to claim 47, wherein said device comprising means for performing a method according to any one of claims 35 to 46.

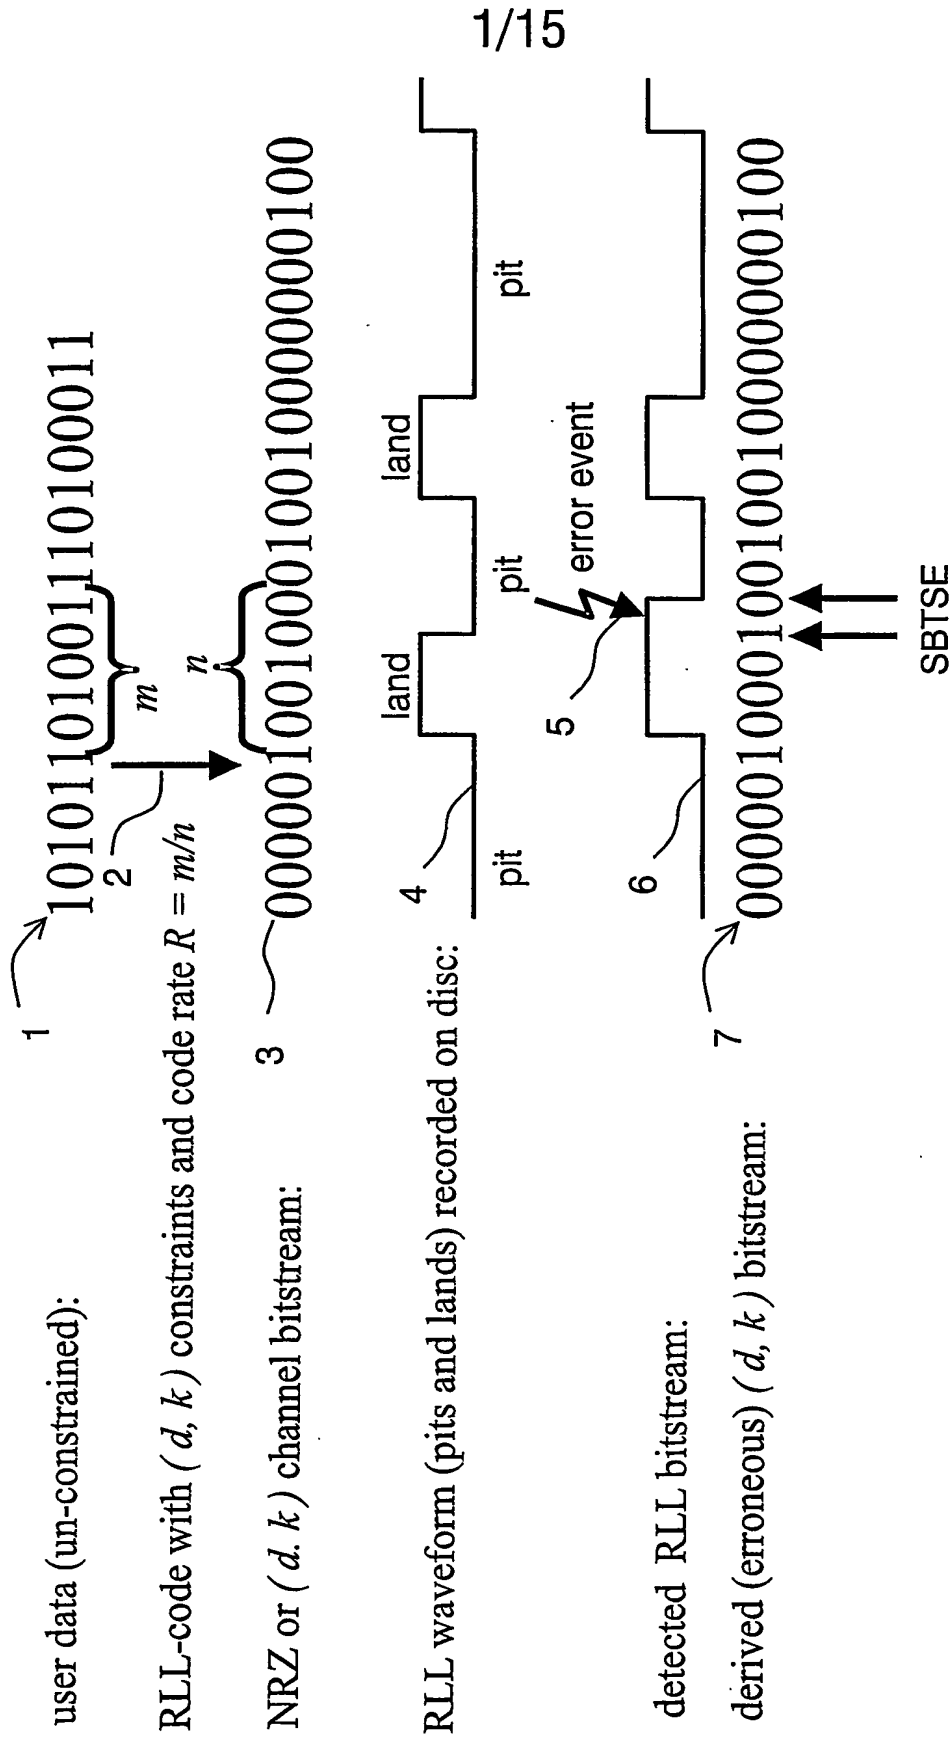


FIG.1

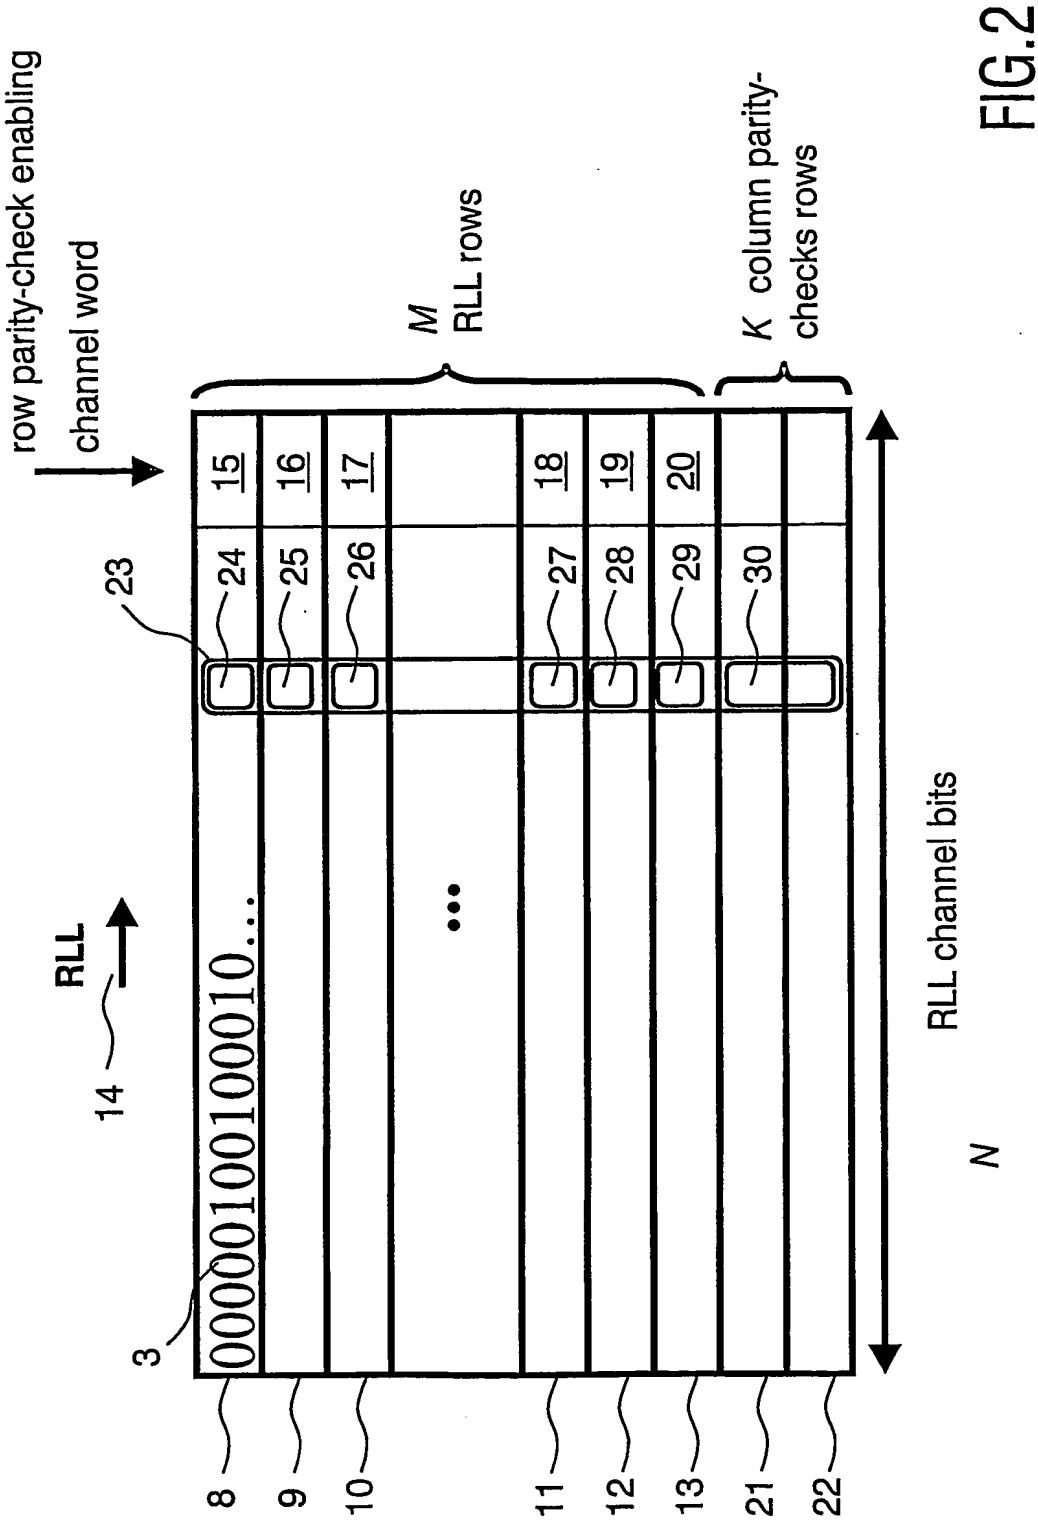


FIG.2

3/15

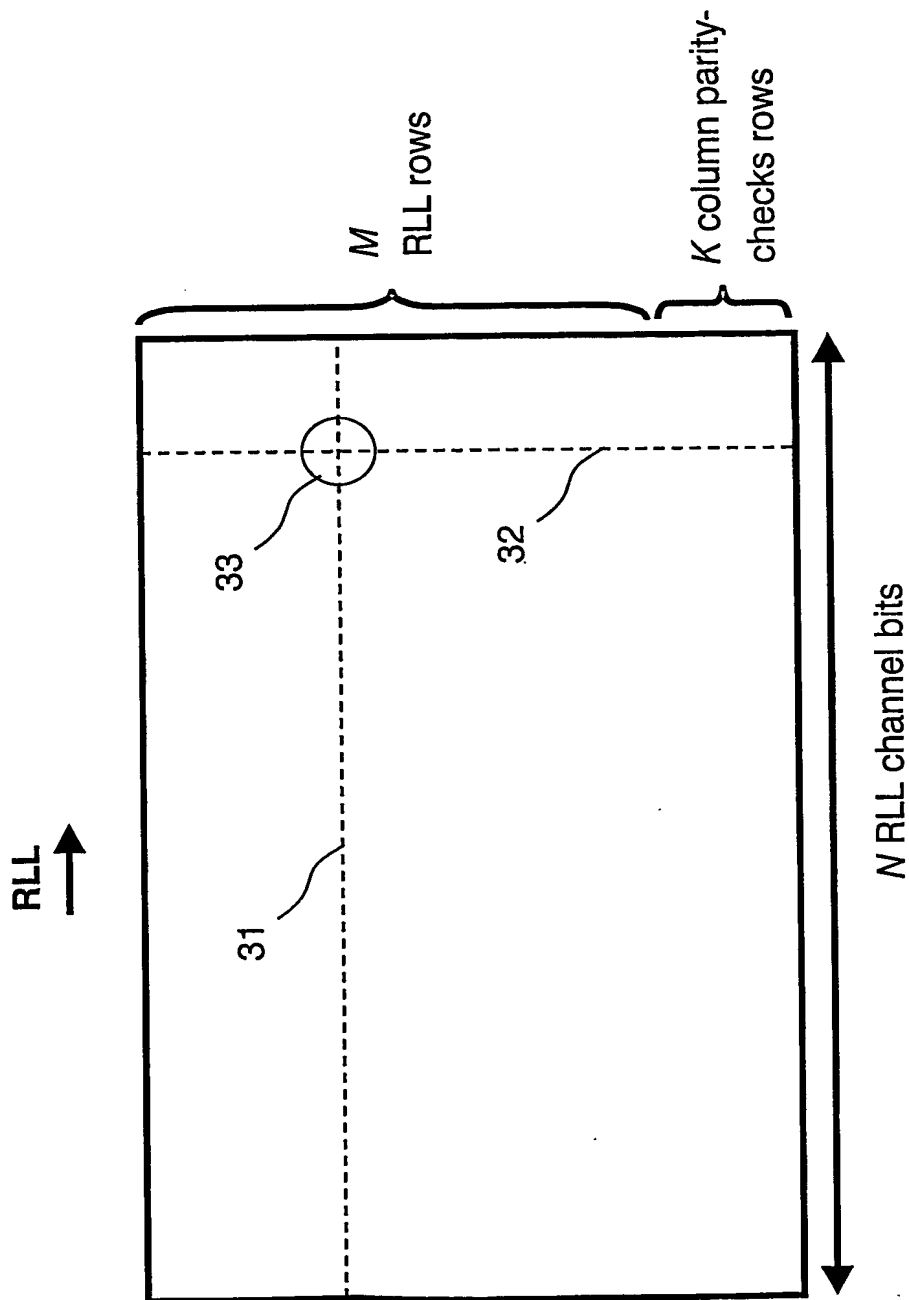


FIG.3

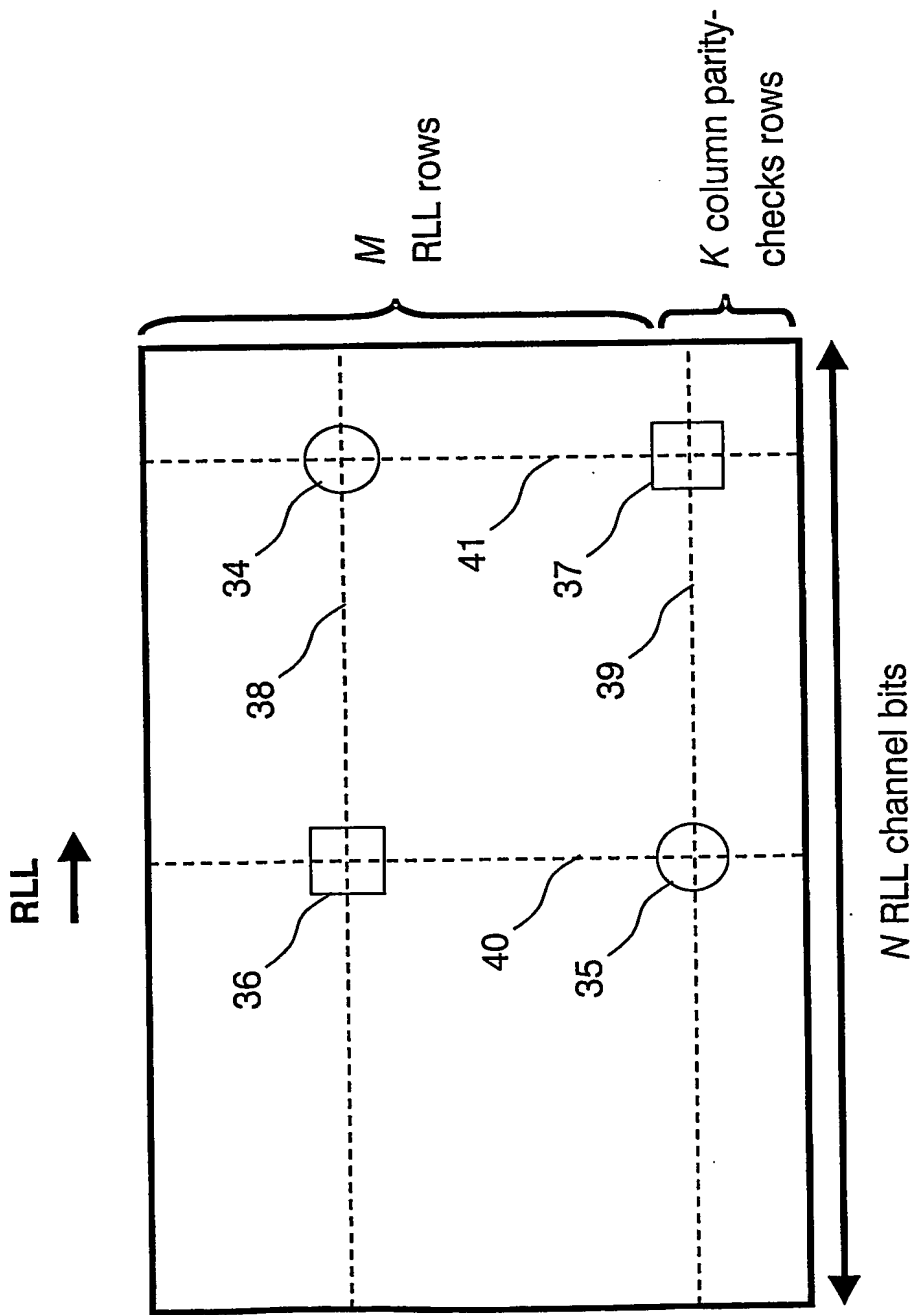


FIG.4

5/15

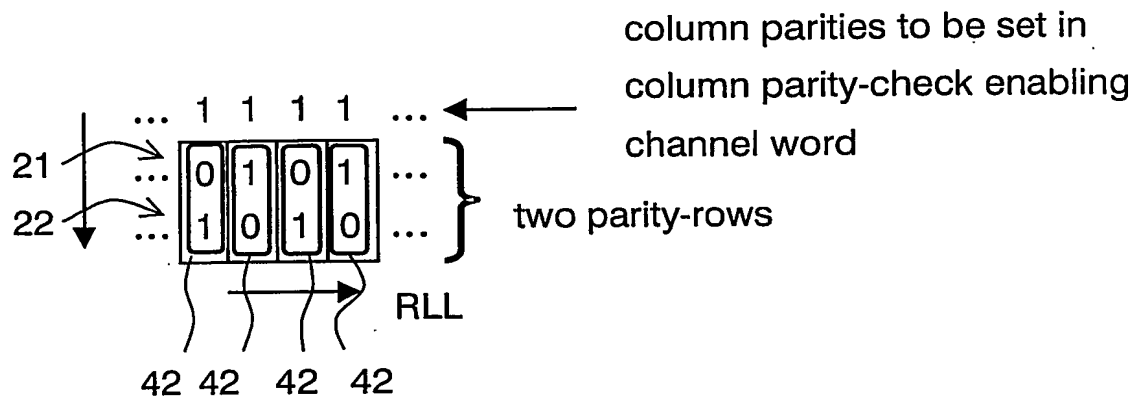


FIG.5

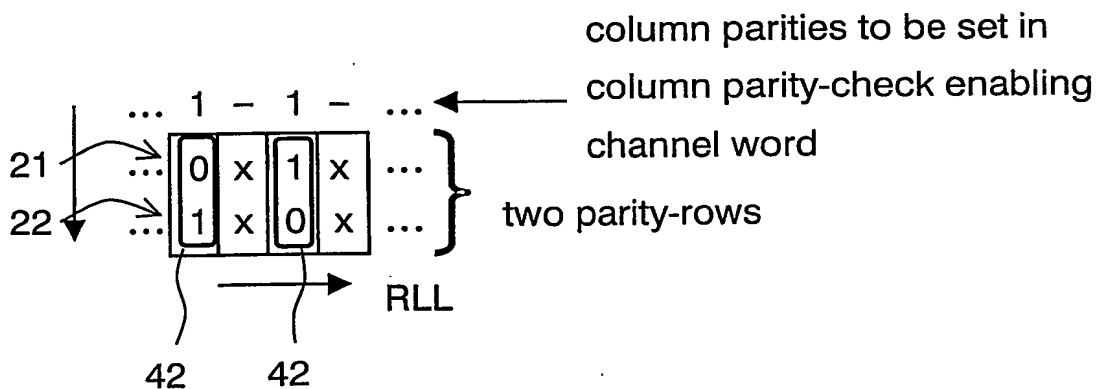


FIG.6

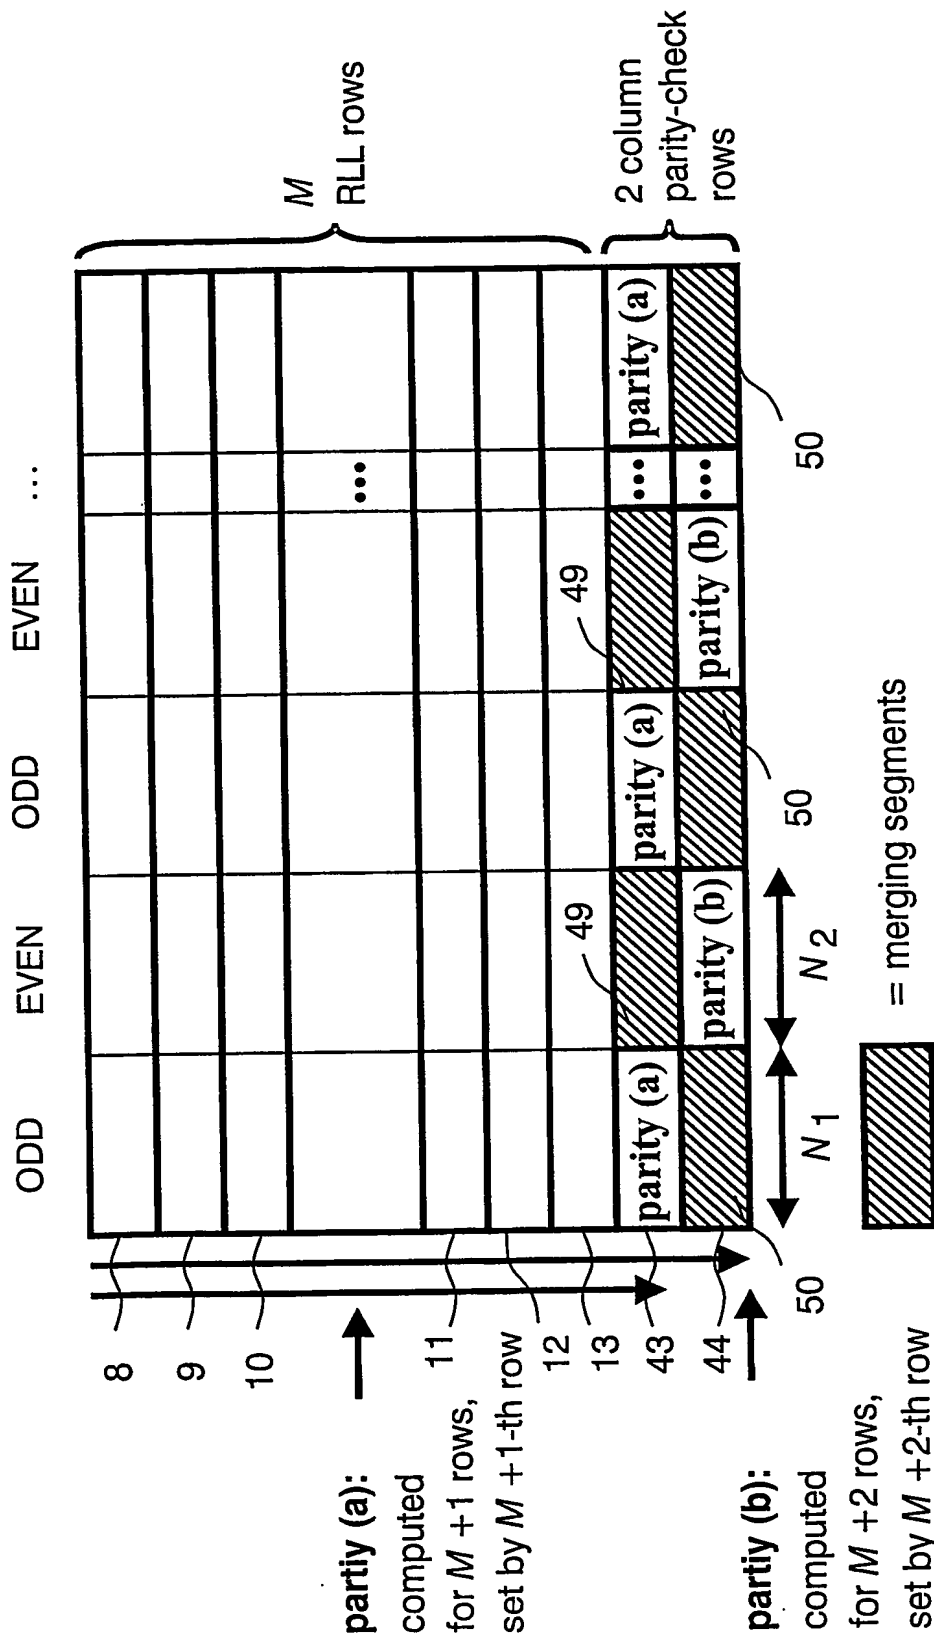


FIG.7

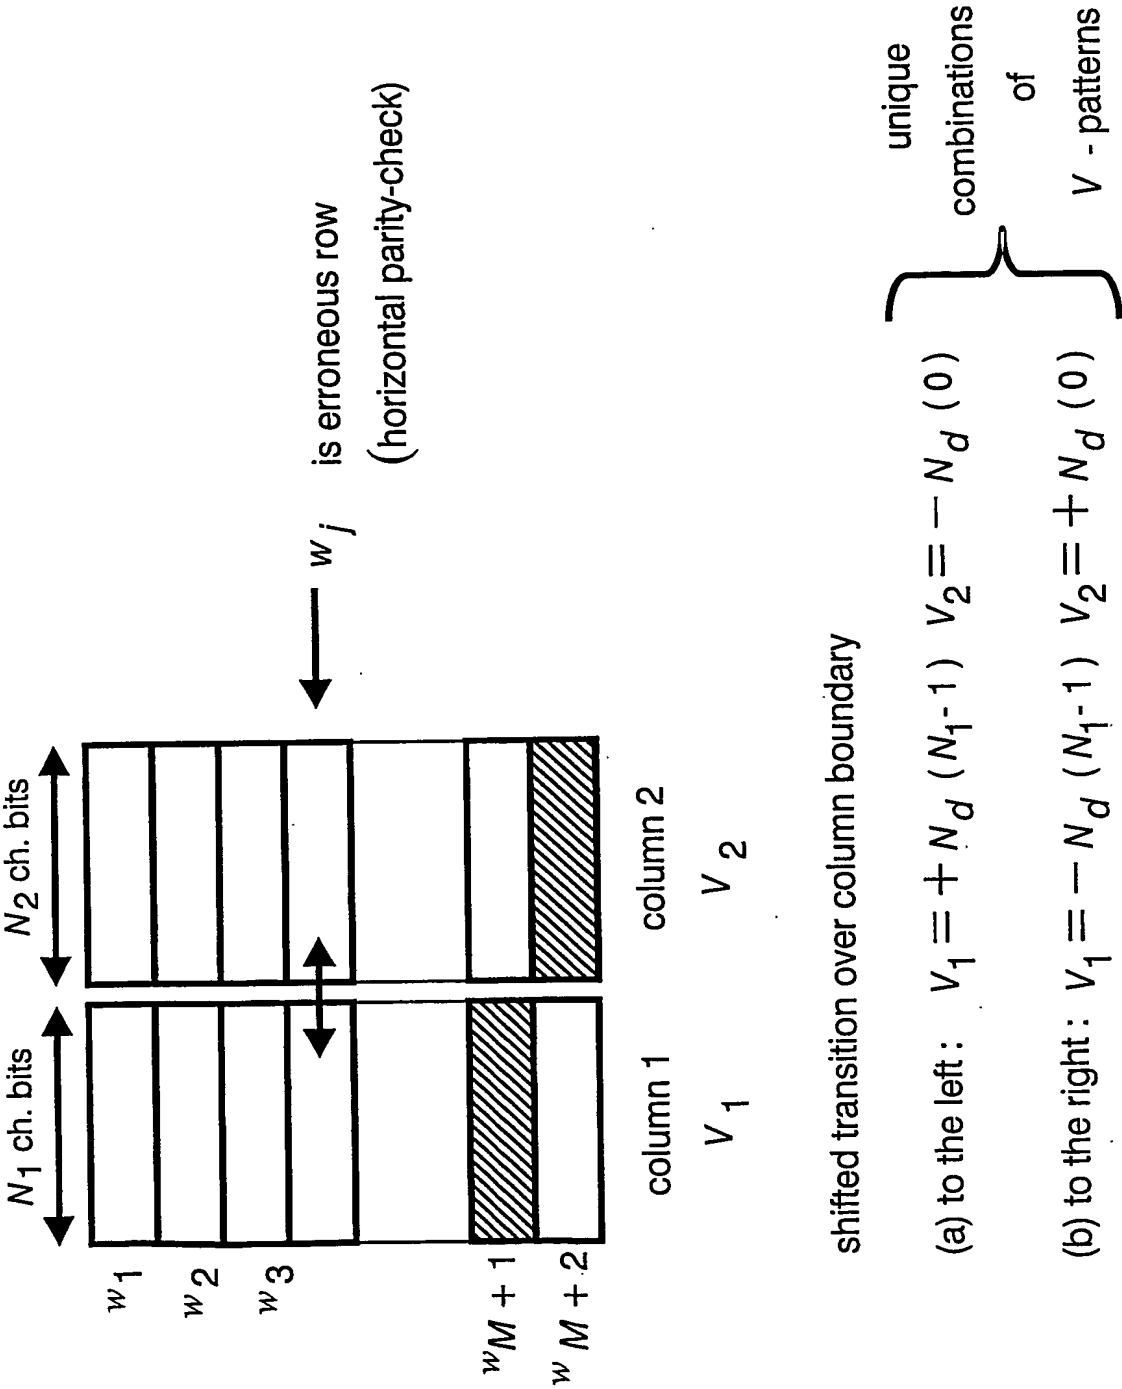


FIG.8

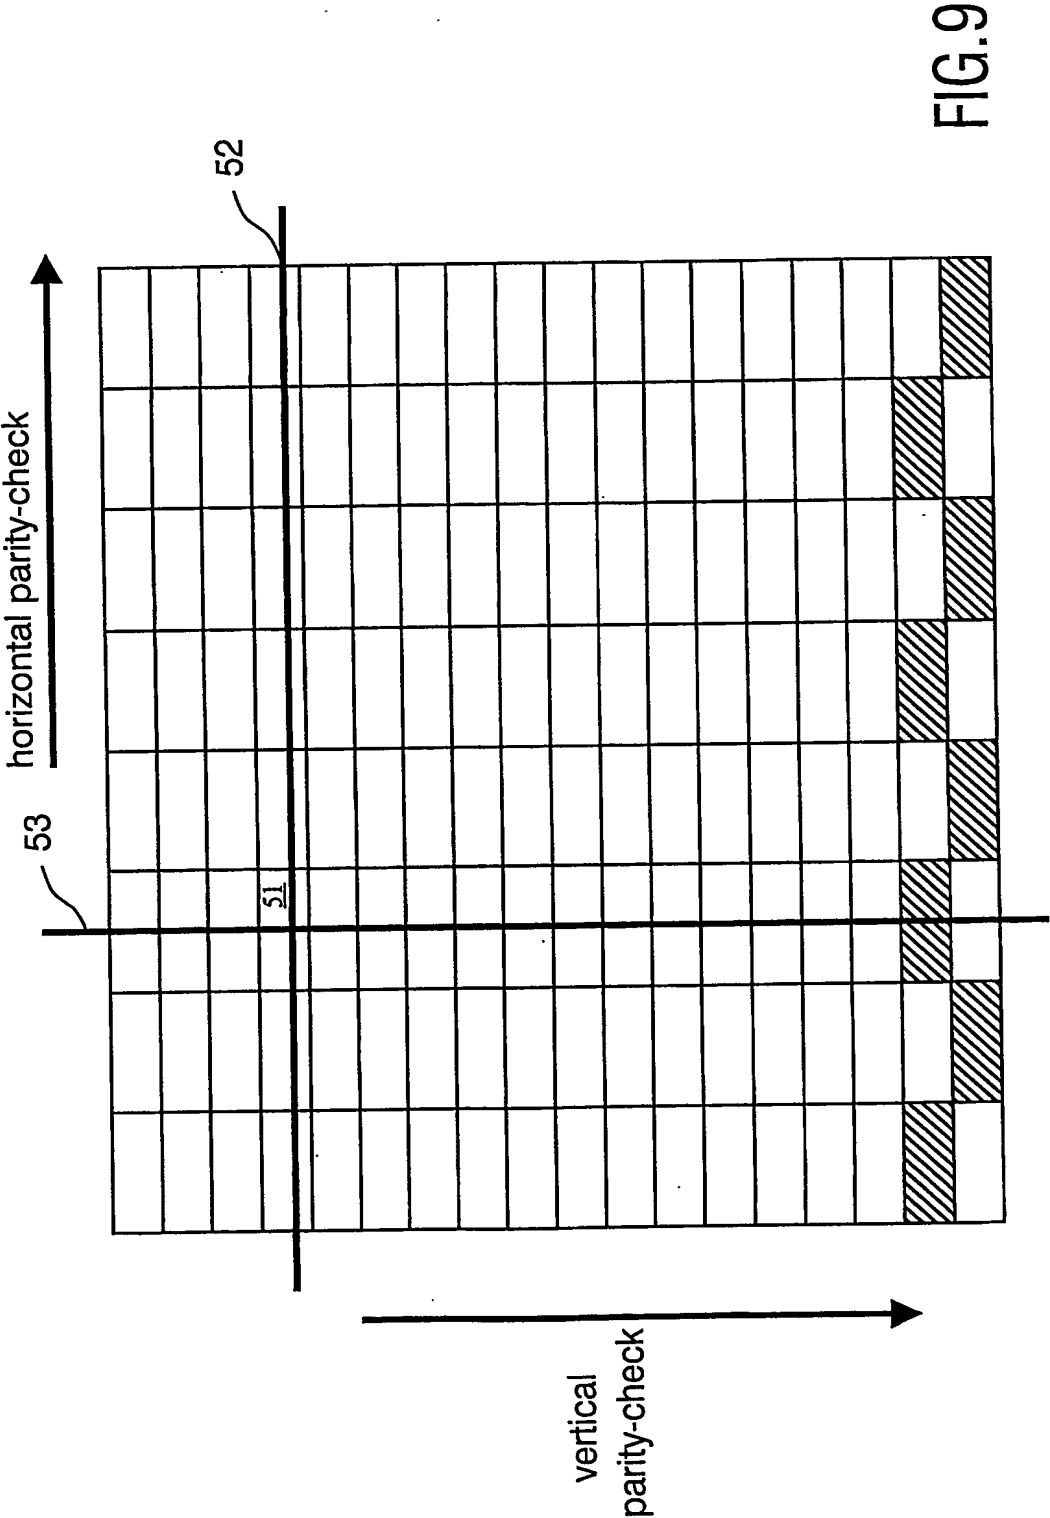


FIG.9

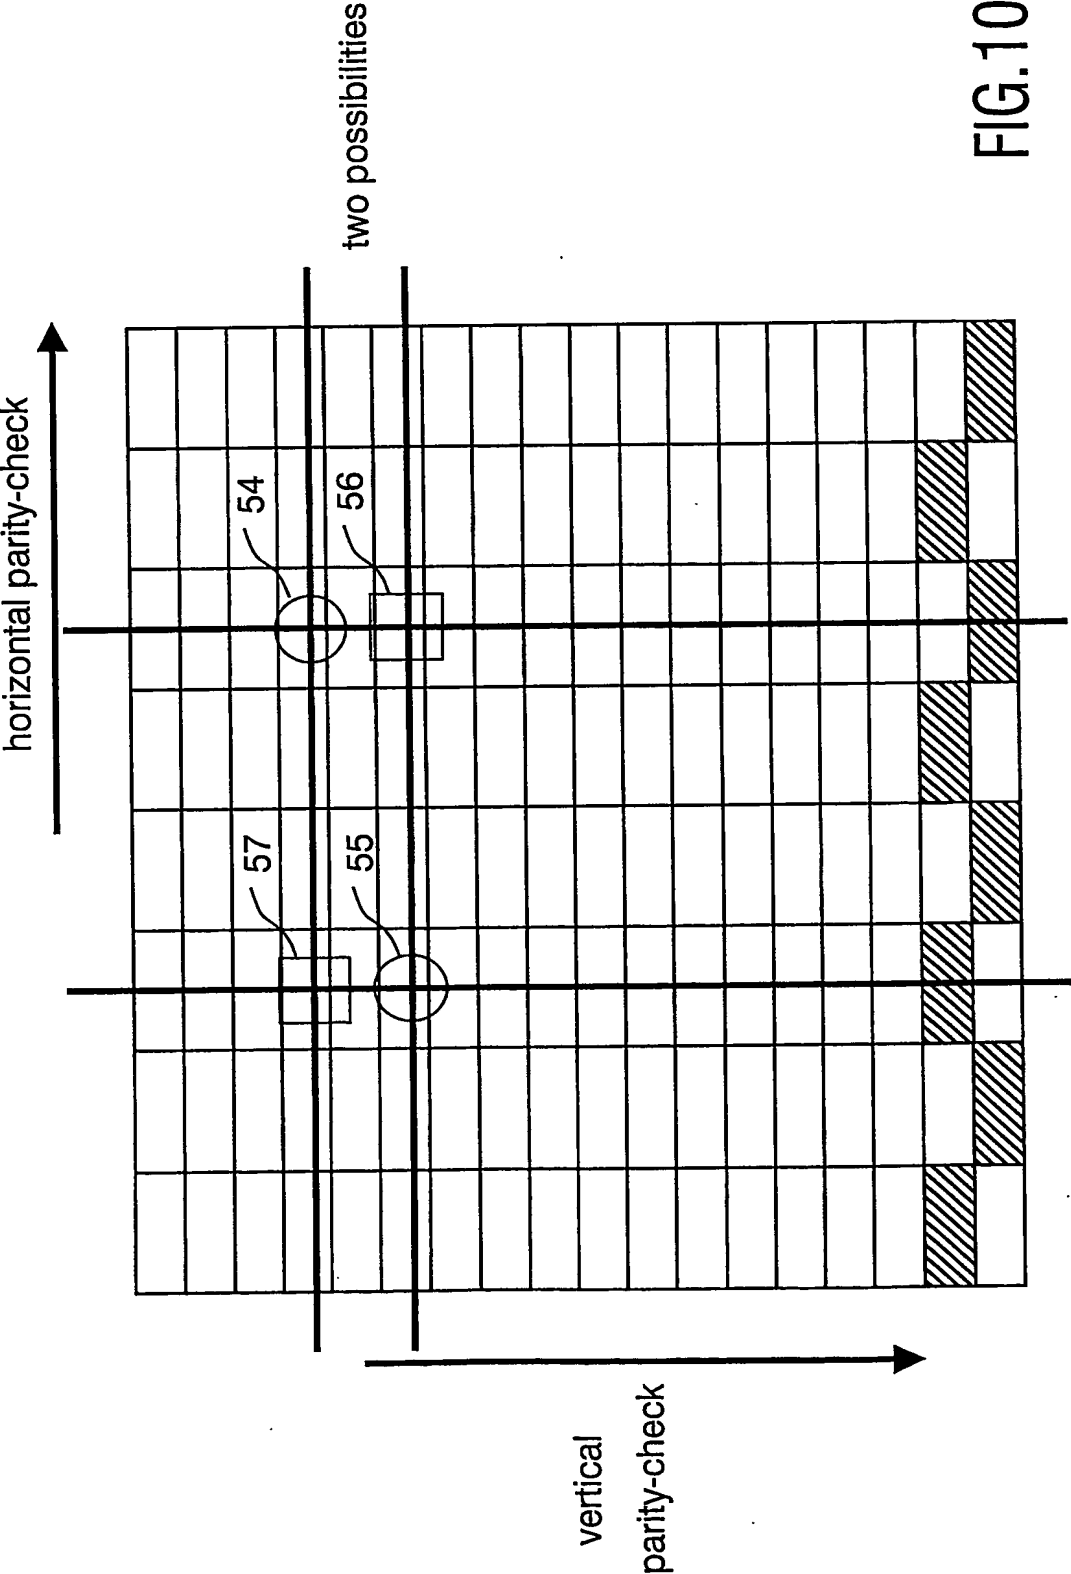


FIG.10

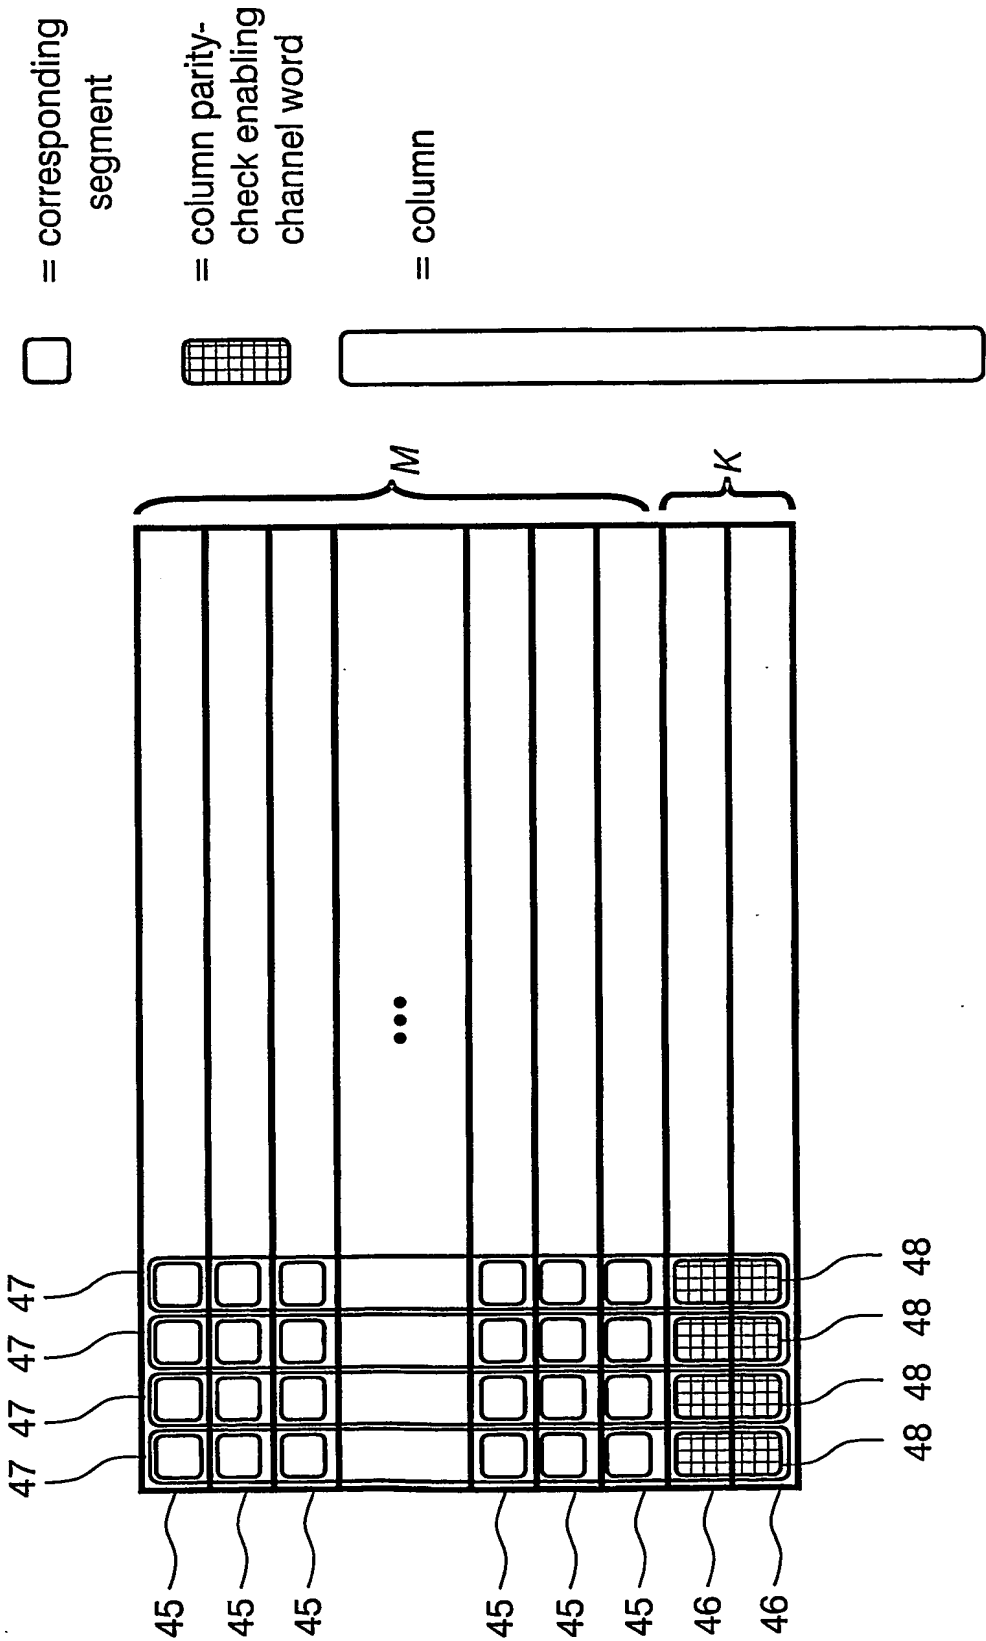


FIG.11

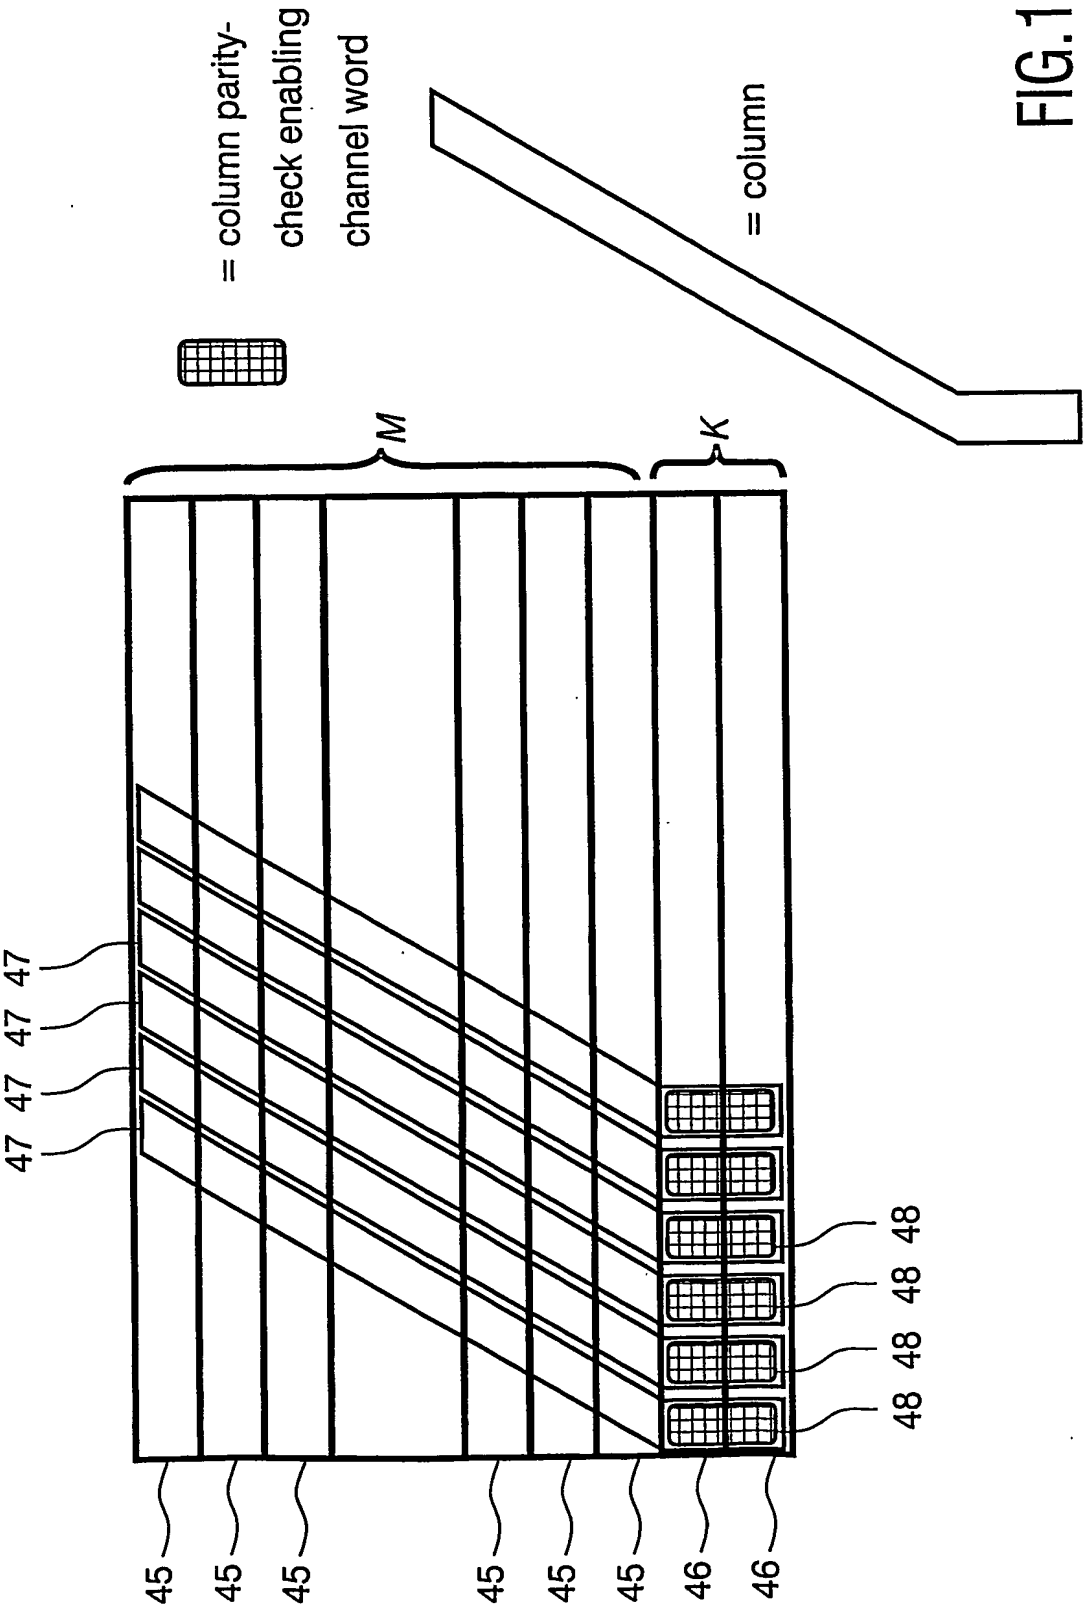


FIG.12

12/15

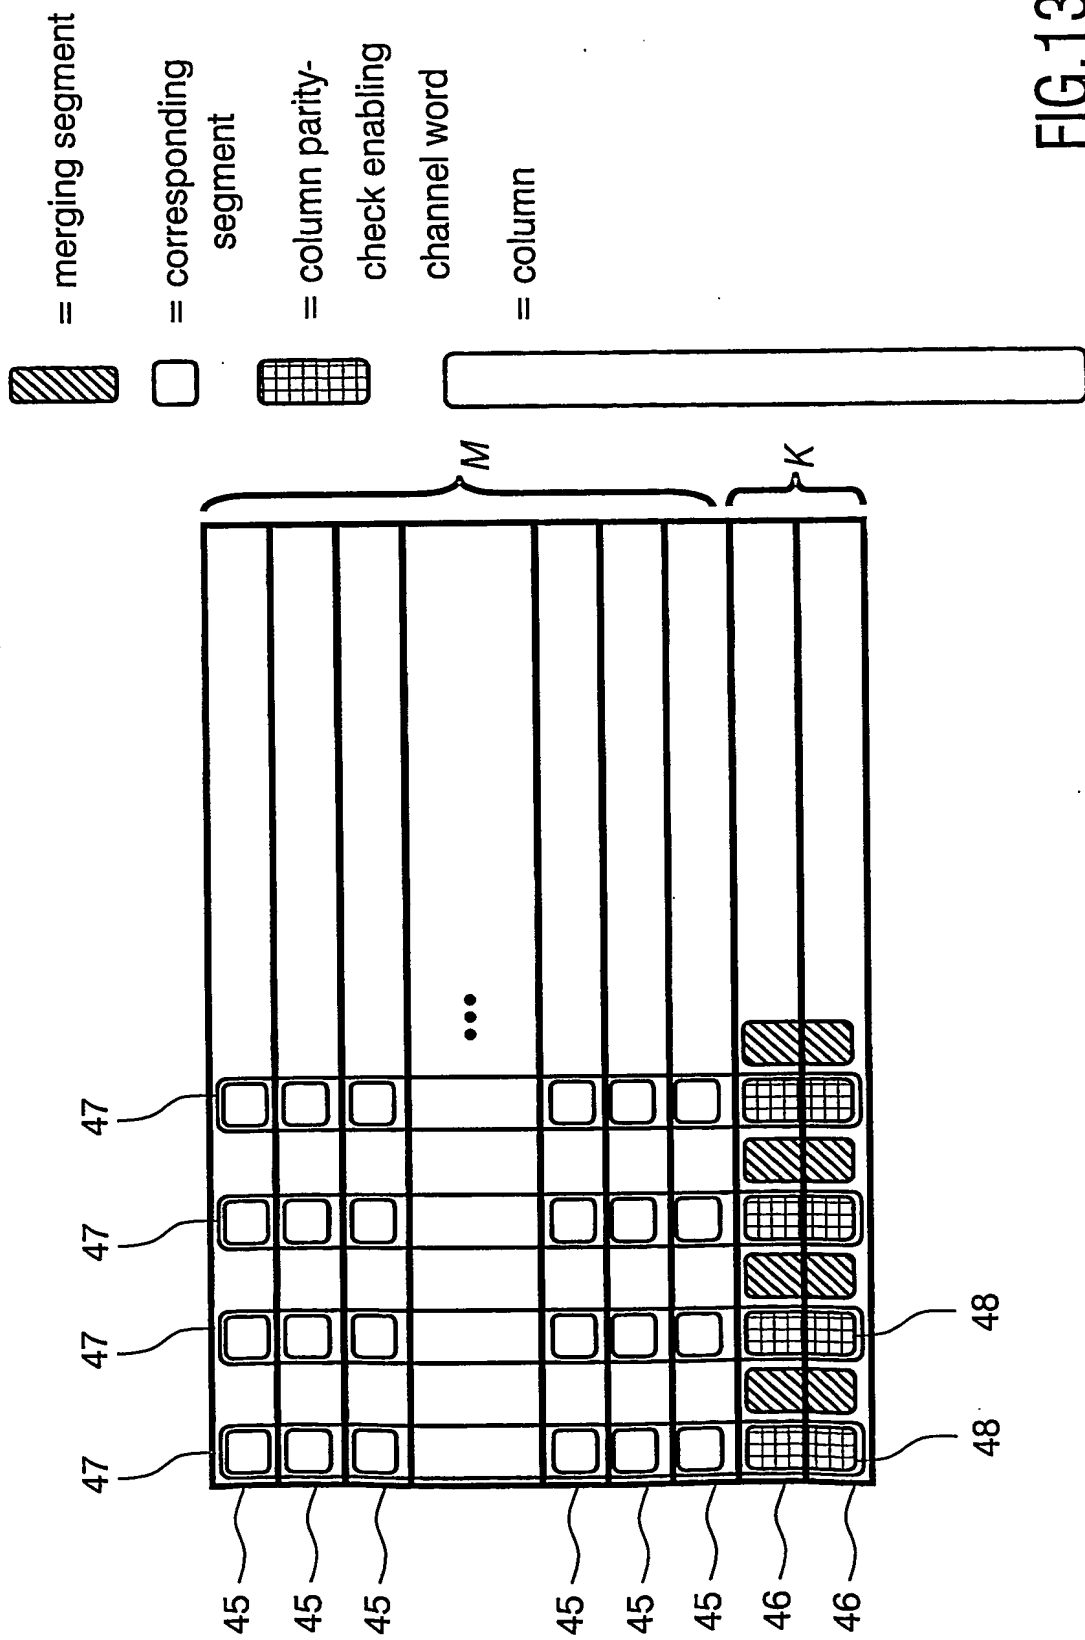


FIG.13

13/15

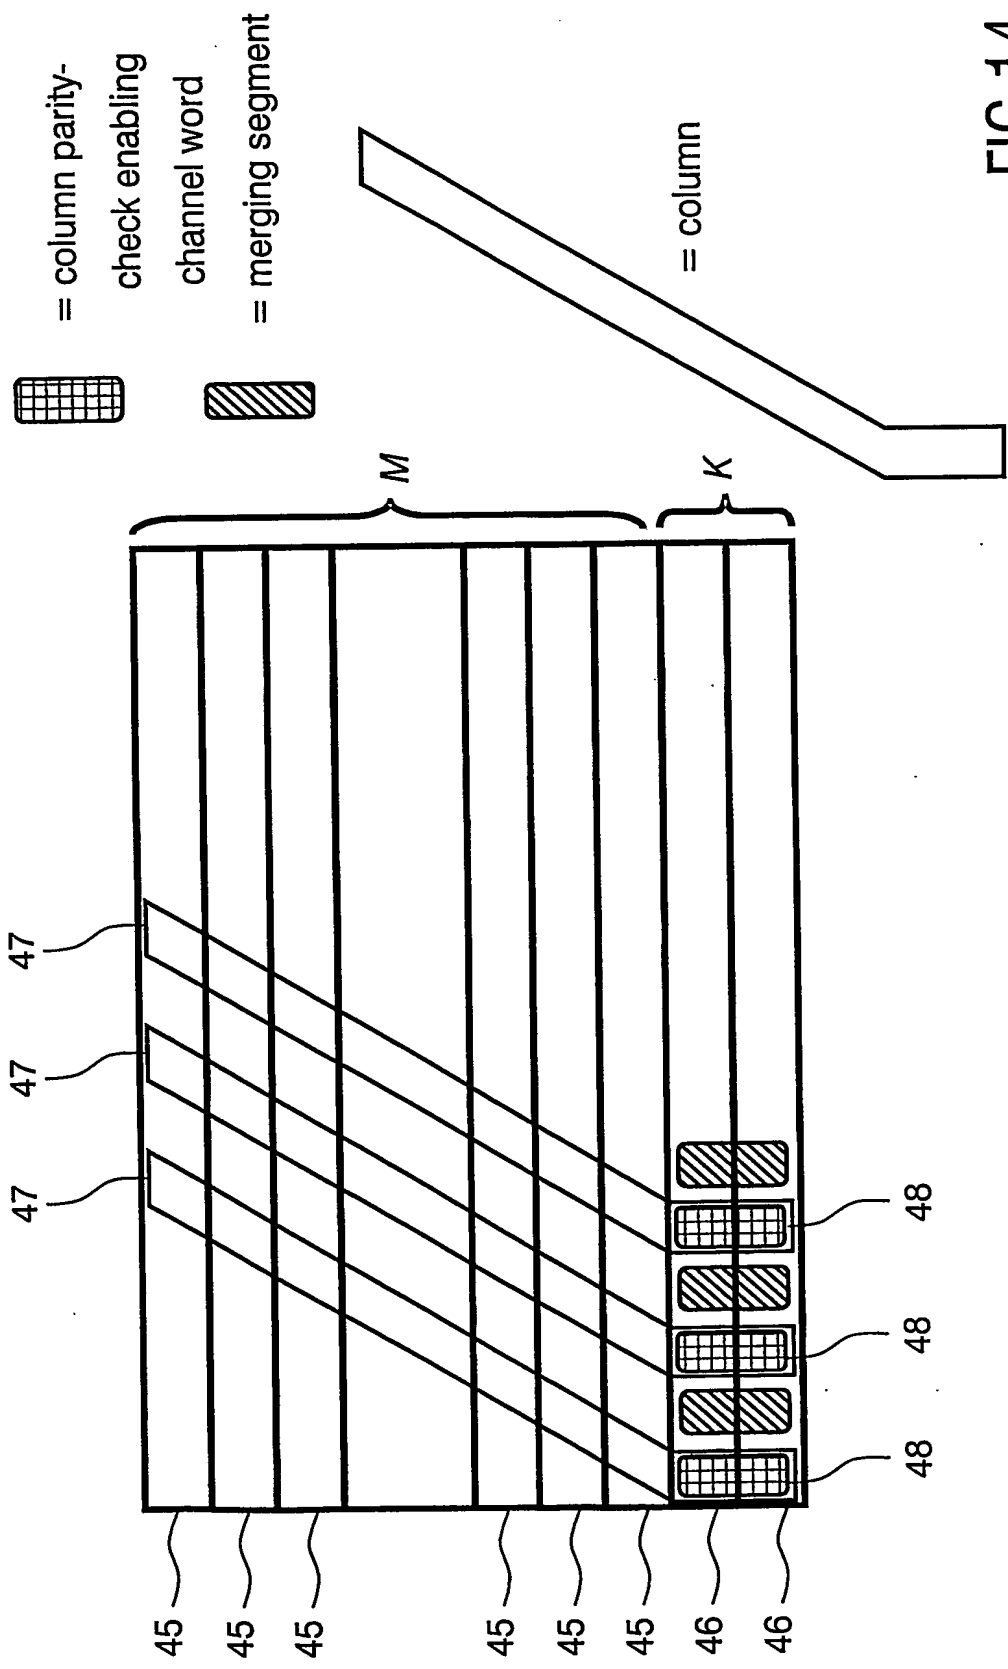


FIG.14

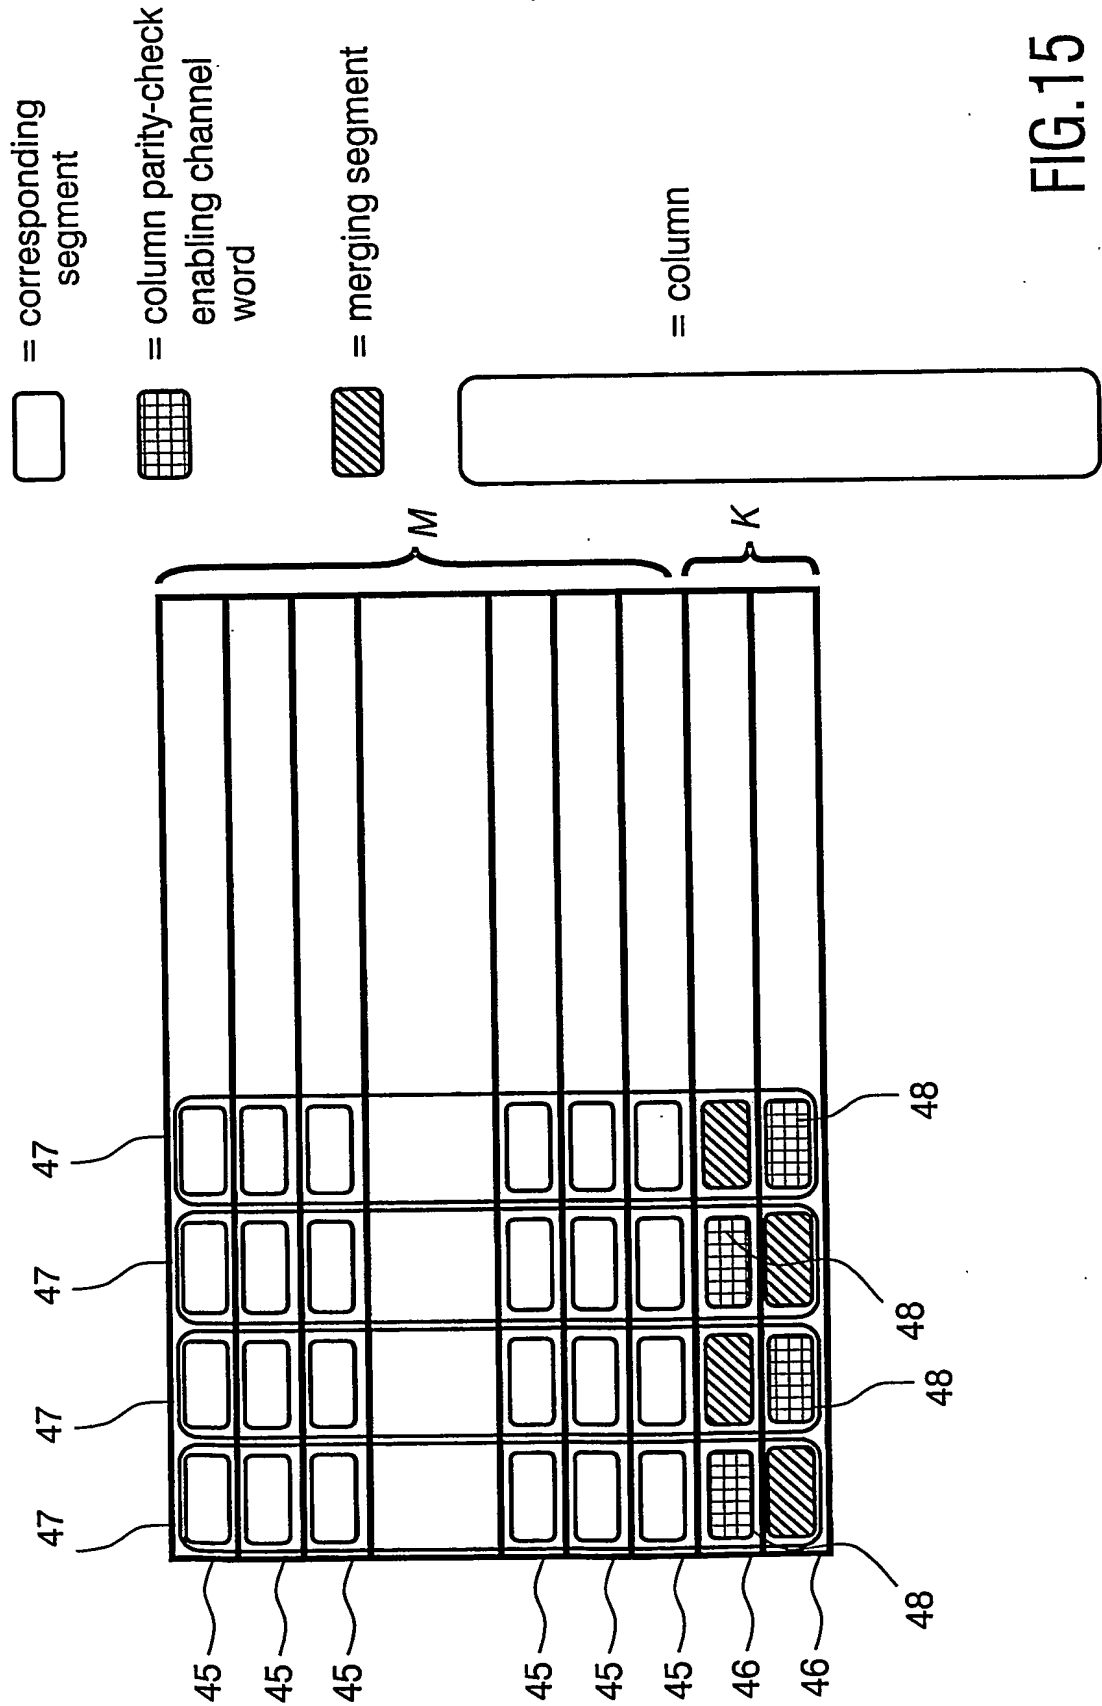


FIG.15

15/15

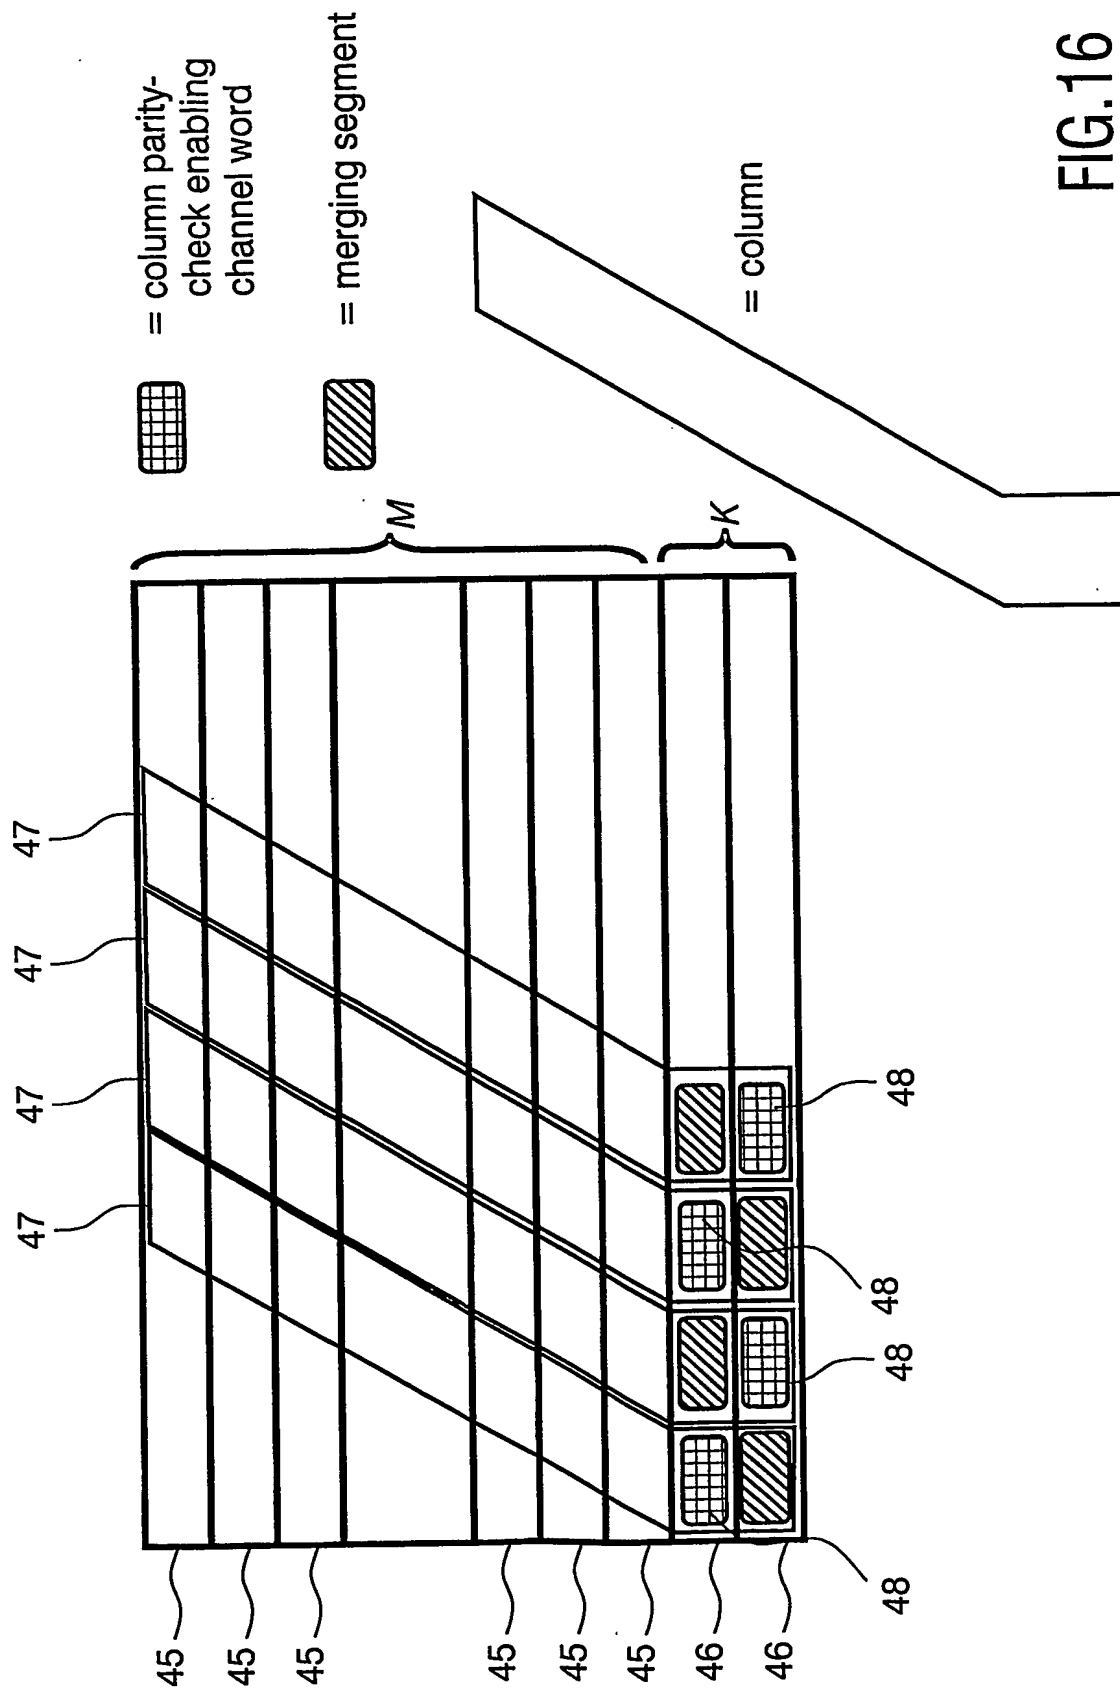


FIG. 16

**(19) World Intellectual Property Organization
International Bureau**



(43) International Publication Date
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number
WO 03/088501 A3

- (51) **International Patent Classification⁷:** **H03M 5/14,** 13/11, 13/29

(21) **International Application Number:** PCT/IB03/01542

(22) **International Filing Date:** 17 April 2003 (17.04.2003)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**
02076526.9 18 April 2002 (18.04.2002) EP

(71) **Applicant (for all designated States except US):** **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) **Inventors; and**

(75) **Inventors/Applicants (for US only):** **COENE, Willem, M., J., M.** [BE/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **KALKER, Antonius, A., C., M.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) **Agent:** **DEGUELLE, Wilhelmus, H., G.;** internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:
— with international search report

Published:

— with international search report

[Continued on next page]

(54) Title: SIGNAL, STORAGE MEDIUM, METHOD AND DEVICE FOR ENCODING, METHOD AND DEVICE FOR DECODING

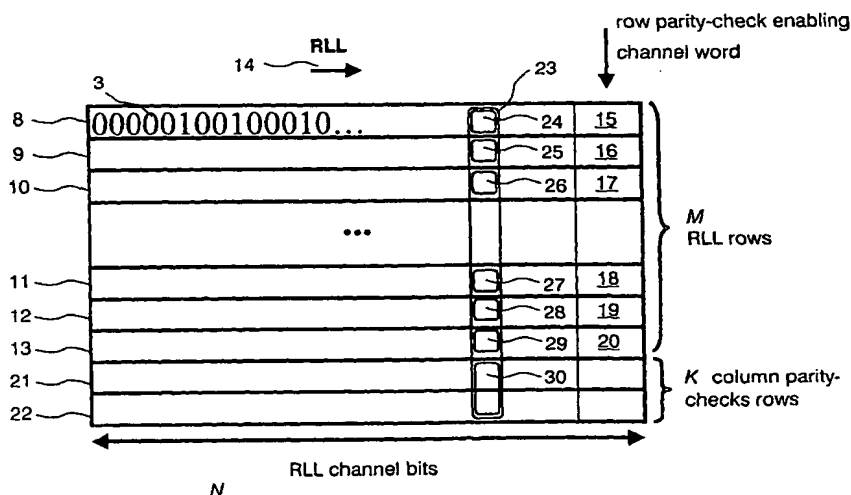

(57) Abstract: The invention relates to a signal comprising a runlength limited (RLL) encoded binary d,k channel bitstream 3, wherein parameter d defines a minimum number and parameter k defines a maximum number of zeroes between any two ones of said bitstream 3 or vice versa, comprising RLL rows 8-13, 45, representing a parity-check code-word, in which a so-called row-based parity-check constraint for said RLL row 8-13, 45 has been realized, characterized in that K sections of respectively N successive channel bits, are located at predetermined positions of a group of M RLL rows. Furthermore, the invention relates to a storage medium comprising such a signal as well as a method and a device for encoding a stream of user data bits into such a signal as well as a method and a device for decoding such a signal.

WO 03/088501 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:
24 December 2003

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 03/01542

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H03M5/14 H03M13/11 H03M13/29

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H03M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, IBM-TDB, COMPENDEX, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	HILDEN H M ET AL: "Shift error correcting modulation codes" MAGNETIC RECORDING CONFERENCE TMRC91, HIDDEN VALLEY, PA, USA, 12-15 JUNE 1991, vol. 27, no. 6, pt.1, pages 4600-4605, XP002257621 IEEE Transactions on Magnetics, Nov. 1991, USA ISSN: 0018-9464 cited in the application the whole document	1-3, 5, 6, 13-16, 28-38, 47, 48
A	---	39

	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

14 October 2003

Date of mailing of the international search report

29/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ogor, M

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/IB 03/01542

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	COENE W ET AL: "Channel coding and signal processing for optical recording systems beyond DVD" IEEE TRANSACTIONS ON MAGNETICS, IEEE INC. NEW YORK, US, vol. 37, no. 2, pt1, 14 August 2000 (2000-08-14), pages 682-688, XP002204220 ISSN: 0018-9464 figure 8 paragraph 'IV.A!	1-3,5,6, 13-16, 28-38, 47,48
A	COENE W ET AL: "Run-Length Limited Parity-Check Coding for Transition-Shift Errors in Optical Recording" GLOBECOM'01. 2001 IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE. SAN ANTONIO, TX, NOV. 25 - 29, 2001, IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE, NEW YORK, NY: IEEE, US, vol. 5 OF 6, 25 November 2001 (2001-11-25), pages 2982-2986, XP002204217 ISBN: 0-7803-7206-9 cited in the application paragraph 'I...! - paragraph 'II...!	1,29-34
A	GOPALASWAMY S ET AL: "MODIFIED TARGET AND CONCATENATED CODING FOR D=1 CONSTRAINED MAGNETIC RECORDING CHANNELS" ICC 2000. 2000 IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS. CONFERENCE RECORD. NEW ORLEANS, LA, JUNE 18-21, 2000, IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, NEW YORK, NY: IEEE, US, vol. 1 OF 3, 18 June 2000 (2000-06-18), pages 89-93, XP001042918 ISBN: 0-7803-6284-5 cited in the application paragraph 'TIT.F	1,5, 29-34

-/-

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB 03/01542

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>SAITOH Y ET AL: "Peak-shift and bit error-correction with channel side information in runlength-limited sequences"</p> <p>APPLIED ALGEBRA, ALGEBRAIC ALGORITHMS AND ERROR-CORRECTING CODES. 10TH INTERNATIONAL SYMPOSIUM, AAECC-10 PROCEEDINGS, SAN JUAN DE PUERTO RICO, PUERTO RICO, 10-14 MAY 1993,</p> <p>pages 304-315, XP008022974</p> <p>1993, Berlin, Germany, Springer-Verlag, Germany</p> <p>ISBN: 3-540-56686-4</p> <p>cited in the application</p> <p>the whole document</p>	1, 29-34
A	<p>SONG H ET AL: "DC-free (d, k) constrained low density parity check (LDPC) codes"</p> <p>2002 INTERNATIONAL SYMPOSIUM ON OPTICAL MEMORY AND OPTICAL DATA STORAGE TOPICAL MEETING. JOINT INTERNATIONAL SYMPOSIUM. TECHNICAL DIGEST (CAT.NO.02EX552), 2002 INTERNATIONAL SYMPOSIUM ON OPTICAL MEMORY AND OPTICAL DATA STORAGE TOPICAL MEETING. JOINT ,</p> <p>pages 377-379, XP002257622</p> <p>2002, Piscataway, NJ, USA, IEEE, USA</p> <p>ISBN: 0-7803-7379-0</p> <p>the whole document</p>	1, 6, 10-12
A	<p>US 4 796 260 A (MANELA DAVID ET AL)</p> <p>3 January 1989 (1989-01-03)</p>	
A	<p>ANONYMOUS: "Format Verification. October 1971."</p> <p>IBM TECHNICAL DISCLOSURE BULLETIN, vol. 14, no. 5,</p> <p>1 October 1971 (1971-10-01), pages 1441-1443, XP002257623</p> <p>New York, US</p>	

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 03/01542

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4796260	A	03-01-1989	NONE
